

Makita[®]

mt





















Index

M0400C	Cutter	05
M0600	Drill	03
M0801K	Hammer Drill	04
M0901	Angle Grinder	05
M0920	Angle Grinder	06
M0921	Angle Grinder	06
M1902	Power Planer	08
M2300	Compound Miter Saw	07
M2401Z	Portable Cut-off	04
M3600	Router	08
M3601	Router (Plunge type)	08
M3700	Trimmer	08

M4000	Blower	08
M4100	Cutter	05
M4301	Jig Saw	07
M5802	Circular Saw	07
M6002	Drill	03
M6500	High Speed Drill	03
M6501	High Speed Drill	03
M6600	Mixer	03
M8103K	Hammer Drill	03
M8103KSP	Hammer Drill	04
M8600	Demolition Hammer	04
M8700	Rotary Hammer	04


M9000	Angle Grinder	05
M9001	Angle Grinder	06
M9100	Die Grinder	06
M9200	Finishing Sander	06
M9203	Finishing Sander	06
M9204	Random Orbit Sander	06
M9400	Belt Sander	06
M9510	Angle Grinder	05
M9511	Angle Grinder	05
M9800KX1	Multi Tool	07

Icon

 Double Insulation	 Keyless Chuck	 17mm Hex Shank	 Orbital Cutting
 Variable Speed	 Mechanical 2-Speed	 Hook & Loop	 Bayonet Shank Jig Saw Blade
 Brake	 Soft Start	 Torque Limiter	 Carrying Case
 Reversing	 Dust Collecting	 Bevel Cutting	
 Mechanical 2-Speed	 SDS-PLUS Shank	 Bevel Cutting 45 LR	

Note

- Makita reserves the right to change specifications of parts and accessories without notice.
- Items of standard equipment and specifications may vary by country or area.
- Please state required voltage when ordering. These offers are subject to availability in each country.
- Actual product color may differ slightly from color reproduced here.
- Weight data in this catalogue is the value measured by us according to EPTA Procedure 01/ver.2.1

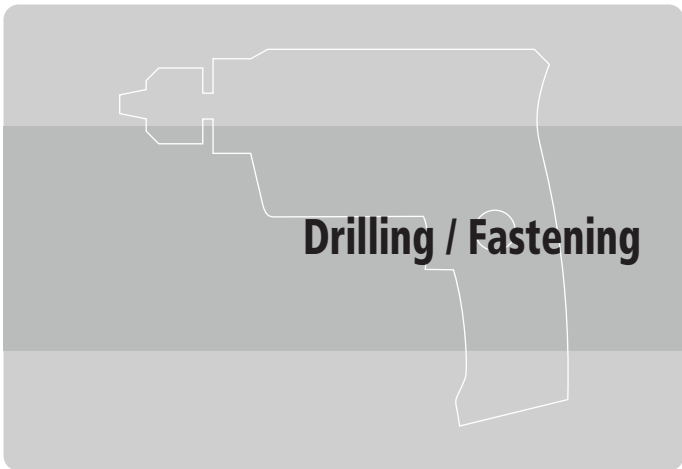

High Speed Drill

M6500 6.5mm 64
 Compact body for superior handling



Continuous rating input	230W
Capacity	Steel: 6.5 mm Wood: 9 mm
No Load Speed (RPM)	4,500
Dimensions (L x W x H)	200x63x164mm
Net weight	0.92kg
Power supply cord	2.0m



Chuck Key

High Speed Drill

M6501 6.5mm 85
 Compact body for superior handling



Continuous rating input	230W
Capacity	Steel: 6.5 mm Wood: 9 mm
No Load Speed (RPM)	0 - 4,500
Dimensions (L x W x H)	203x63x171mm
Net weight	0.95kg
Power supply cord	2.0m



Chuck Key

Drill

M6002 10mm 85
 Powerful motor with 450W input power



Continuous rating input	450W
Capacity	Steel: 10 mm Wood: 25 mm
No Load Speed (RPM)	0 - 3,000
Dimensions (L x W x H)	234x64x175mm
Net weight	1.3kg
Power supply cord	2.0m



Chuck Key

Drill

M0600 10mm ENTRY LEVEL 85
 Powerful motor, 350W in max. power input



Continuous rating input	350W
Capacity	Steel: 10 mm Wood: 20 mm
No Load Speed (RPM)	0-3,000
Dimensions (L x W x H)	230x66x176mm
Net weight	1.2kg
Power supply cord	2.0m



Chuck Key

Mixer


M6600 303
 With Variable speed control switch



Continuous rating input	800W
No Load Speed (RPM)	0-700
Shank size of tool holder portion	M14
Dimensions (L x W x H)	280x86x388mm
Net weight	3.4kg
Power supply cord	2.0m



Wrenches, Side Grip

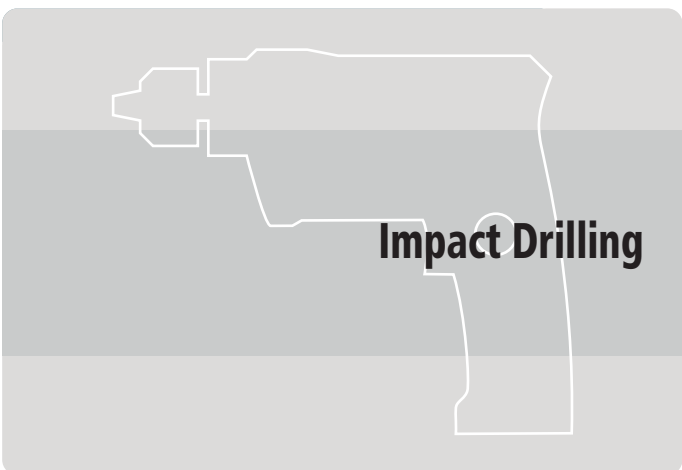

Hammer Drill

M8103K 13 mm 85
 13 mm (1/2") Hammer Drill With Keyed Chuck



Continuous rating input	430W
Capacity	Concrete: 13 mm Steel: 13 mm Wood: 18 mm
No Load Speed (RPM)	0 - 3,000
Impacts Per Minute (IPM)	0 - 33,000
Vibration Level	Concrete: 19.5 m/s ² Metal: 3.5 m/s ²
Dimensions (L x W x H)	255x72x193mm
Net weight	1.8 kg
Power supply cord	2.0 m



Side Handle, Depth Gauge, Chuck Key, Chuck Key Holder, Carry Case

Hammer Drill

M8103KSP 13 mm **85** 
13 mm (1/2") Hammer Drill With Keyed Chuck with Accessories set



Continuous rating input	430W
Capacity	Concrete: 13 mm
	Steel: 13 mm
	Wood: 18 mm
No Load Speed (RPM)	0 - 3,000
Impacts Per Minute (IPM)	0 - 33,000
Dimensions (L x W x H)	255x72x193mm
Net weight	1.8 kg
Power supply cord	2.0 m



Side Handle, Depth Gauge, Chuck Key, Chuck Key Holder, Carry Case with Accessories set



Hammer Drill

M0801K 16mm **ENTRY LEVEL** **85** 
Variable speed control by trigger from 0 to 2,900 min.⁻¹




Continuous rating input	500W
Capacity	Concrete: 16 mm
	Steel: 13 mm
	Wood: 20 mm
No Load Speed (RPM)	0 - 43,500
Impacts Per Minute (IPM)	0 - 2,900
Dimensions (L x W x H)	262x70x196mm
Net weight	1.7kg
Power supply cord	2.0m



Chuck Key, Side Grip

Rotary Hammer

M8700 22mm Adapted for SDS-PLUS bits **459** 
Operation mode change lever positioned on the bottom of gear housing or reduced possibility of breakage



Continuous rating input	710W
Capacity	Concrete: 22 mm
	Steel: 13 mm
	Wood: 32 mm
No Load Speed (RPM)	0 - 4,350
Impacts Per Minute (IPM)	0 - 1,100
Dimensions (L x W x H)	362x71x194mm
Net weight	2.5kg
Power supply cord	5.0m



Depth Gauge, Side Grip

Tool does not come with bit.



Demolition Hammer

M8600 17mm Hex Shank **105** 
Makita-MT- series 5kg class 17mm hex shank demolition hammer



Continuous rating input	900W
Impacts Per Minute (IPM)	2,900
Joules	7.2J
Dimensions (L x W x H)	406x99x232mm
Net weight	5.4kg
Power supply cord	2.5m



Bull point, Side Grip, Bit grease, Cleaning cloth

Portable Cut-off

M2401Z 355mm **203** 
Makita-MT- series powerful 355mm Portable Cut-Off




Continuous rating input	2,000W
Wheel Diameter	355 mm
No Load Speed (RPM)	3,800
Dimensions (L x W x H)	500x280x620mm
Net weight	14.3 kg
Power supply cord	2.5 m



Hex Wrench

Tool does not come with depressed center wheel.

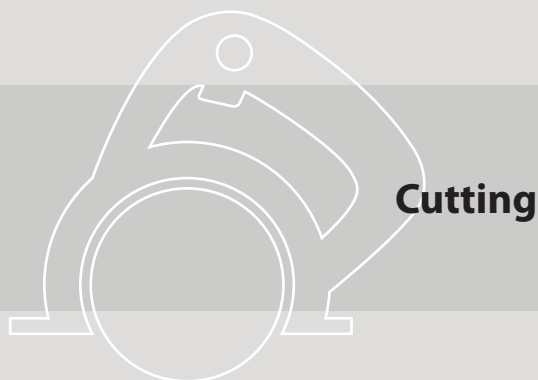

Cutter

M4100 110mm

303

High power motor for heavy-duty applications

new



Continuous rating input	1,200W
Blade Diameter	110 mm
Max Cutting Capacity	90°: 32 mm
No Load Speed (RPM)	13,000
Vibration Level	Concrete Cutting: 5.5 m/s ²
Dimensions (L x W x H)	227x209x166 mm
Net weight	2.9 kg
Power supply cord	2.0 m



Tool does not come with diamond wheel.

Tube Holder, Vinyl Tube, Wrench, Hex Wrench

Cutter

M0400C 110mm

ENTRY LEVEL 303

Specialized for right angle cutting only

new




Continuous rating input	1,200W
Blade Diameter	at 90°: 32.0mm
Max Cutting Capacity	110 mm
No Load Speed (RPM)	13,000
Dimensions (L x W x H)	231x195x164mm
Net weight	2.6kg
Power supply cord	2.0m



Tool does not come with diamond wheel.

Wrench, Hex Wrench, Vinyl tube, Tube holder

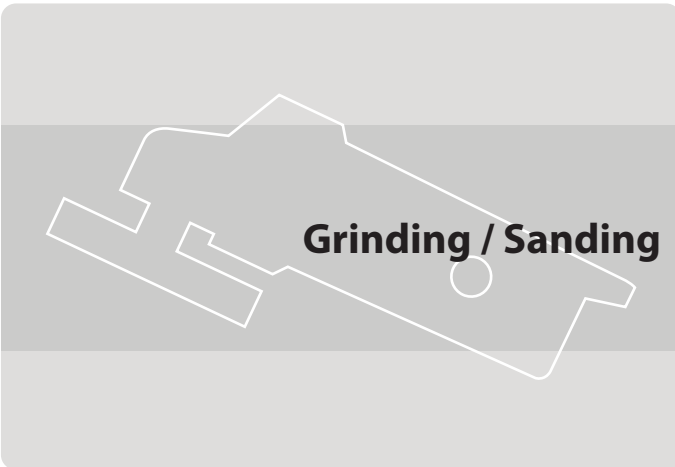

Angle Grinder

M0901 115mm

ENTRY LEVEL 459

Two Action Safety Switch in compliance with the requirement of the new regulations



Continuous rating input	540W
Wheel diameter	115mm
No Load Speed (RPM)	12,000
Dimensions (L x W x H)	251x130x106mm
Net weight	1.7kg
Power supply cord	2.0m



Tool does not come with depressed center wheel.

Lock Nut Wrench, Side Grip

Angle Grinder

M9510 115mm

325

115 mm (4-1/2") 850W Powerful Angle Grinder



Continuous rating input	850W
Wheel diameter	115mm
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	276x130x111mm
Net weight	2.0 kg
Power supply cord	2.0 m



Tool does not come with depressed center wheel.

Side Handle, Lock Nut Wrench

Angle Grinder

M9511 125 mm

325

125 mm 850W Powerful Angle Grinder



Continuous rating input	850W
Wheel diameter	125mm
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	276x140x111mm
Net weight	2.0 kg
Power supply cord	2.0 m



Tool does not come with depressed center wheel.

Side Handle, Lock Nut Wrench

Angle Grinder

M9000 180mm

204

Anti-dust, heavy-duty motor



Continuous rating input	2,000W
Wheel diameter	180mm
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	466x200x138mm
Net weight	5.4kg
Power supply cord	2.0m



Tool does not come with depressed center wheel.

Lock Nut Wrench, Side Grip

Angle Grinder

M0920 180mm
Heavy-duty motor

ENTRY LEVEL 203mm



Continuous rating input	2,200W
Wheel diameter	180mm
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	439x200x141mm
Net weight	5.0kg
Power supply cord	2.0m



Lock Nut Wrench, Side Grip

Tool does not come with depressed center wheel.

Angle Grinder

M9001 230mm
Anti-dust, heavy-duty motor

204mm



Continuous rating input	2,000W
Wheel diameter	230mm
No Load Speed (RPM)	6,600
Dimensions (L x W x H)	466x250x138mm
Net weight	5.7kg
Power supply cord	2.0m



Lock Nut Wrench, Side Grip

Tool does not come with depressed center wheel.

Angle Grinder

M0921 230mm
Heavy-duty motor

ENTRY LEVEL 203mm



Continuous rating input	2,200W
Wheel diameter	230mm
No Load Speed (RPM)	6,600
Dimensions (L x W x H)	439x250x141mm
Net weight	5.3kg
Power supply cord	2.0m



Lock Nut Wrench, Side Grip

Tool does not come with depressed center wheel.

Die Grinder

M9100 6 mm
6mm Toggle Switch High Speed Die Grinder

411mm



Continuous rating input	480W
Capacity	Collet : 6mm or 1/4"
Wheel diameter	20mm
No Load Speed (RPM)	33,000
Dimensions (L x W x H)	350 mm
Net weight	1.4 kg
Power supply cord	2.0 m



Wrench

Tool does not come with wheel point.

Belt Sander

M9400 100mm
Industrial performance and durability

153mm



Continuous rating input	940W
Belt size	100 x 610mm
Belt speed	380m / min.
Dimensions (L x W x H)	354x175x169mm
Net weight	6.2kg
Power supply cord	2.0m



Abrasive belt, Step, Dust bag assembly, Carbon plate

Finishing Sander

M9200
Extremely versatile sander

419mm



Continuous rating input	180W
Pad size	112 x 102 mm
Abrasive Paper Size	114 x 140 mm
Orbits Per Minute (OPM)	14,000
Dimensions (L x W x H)	110x112x133mm
Net weight	0.89kg
Power supply cord	2.0m



Abrasive paper x6

Finishing Sander

M9203
1/3 Sheet 190W Finishing Sander With Built-in Dust Collection

64mm



Continuous rating input	190W
Pad size	92 x 185 mm
Abrasive Paper Size	93 x 228 mm
Orbits Per Minute (OPM)	12,000
Strokes Per Minute (SPM)	24,000
Orbit Diameter	2.0 mm
Dimensions (L x W x H)	252x92x154mm
Net weight	1.4 kg
Power supply cord	2.0 m



Abrasive Paper, Punch Plate, Dust Bag

Random Orbit Sander

M9204 125 mm
125 mm 240W Random Orbit Sander With Built-in Dust Collection


419mm



Continuous rating input	240W
Pad size	123 mm
Abrasive Paper Size	125 mm
Orbits Per Minute (OPM)	12,000
Strokes Per Minute (SPM)	24,000
Orbit Diameter	2.8 mm
Dimensions (L x W x H)	153x123x144mm
Net weight	1.2 kg
Power supply cord	2.0 m



Dust Bag, Abrasive Paper

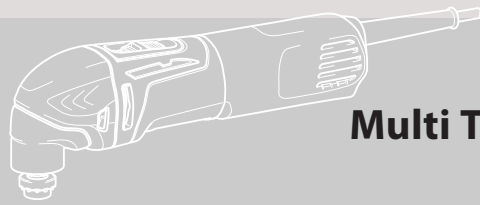

Multi Tool

Multi Tool

M9800KX1

12 angle settings position of accessories allows for a wide range of applications. Set accessories from 0° to 360°.


new



Continuous rating input	220w
Oscillations per minute :	15,000-22,000 opm min-1
Dimensions (L x W x H)	281x65x90mm
Net weight	1.3kg



Hex wrench, Sanding Pad, Abrasive paper delta (red) and carry case

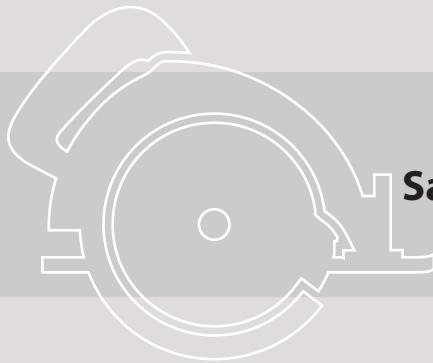

Sawing

Compound Miter Saw

M2300 255mm

Economy but durable



Continuous rating input	1,500W
Max cutting capacity	@ 0°: 75x130mm @ 45°: 75x90mm
Blade diameter	255mm
No load speed (rpm)	4,200
Dimensions (L x W x H)	610x485x515mm
Net weight	14.7kg
Power supply cord	2.5m



Carbide-Tipped Saw Blade, Wrench, Dust Bag, Holders 2, Vise Assembly, Triangular Rule, Set Plate

Circular Saw

M5802 190 mm, 185 mm

190 mm (7-1/2") / 185 mm (7-1/4") 1,050W Circular Saw

303



Continuous rating input	1,050W
Max cutting capacity	190 / 185 mm
	at 90°: 68 / 66 mm
	at 45°: 46 / 44 mm
Blade diameter	
No load speed (rpm)	4,900
Dimensions (L x W x H)	297 mm
Net weight	4.0 kg
Power supply cord	2.0 m



TCT Saw Blade, Guide Rule, Hex Wrench



Jig Saw

M4301

450W Top Handle Jig Saw -3 Orbital Settings Plus Straight Cutting


64



Continuous rating input	450W
Max Cutting Capacity @ 90°	Wood: 65 mm Steel: 6 mm
length Of Stroke	18 mm
Strokes Per Minute (SPM)	0 - 3,100
Dimensions (L x W x H)	214x75x202mm
Net weight	1.9 kg
Power supply cord	2.0 m



Jig Saw Blade, Hex Wrench

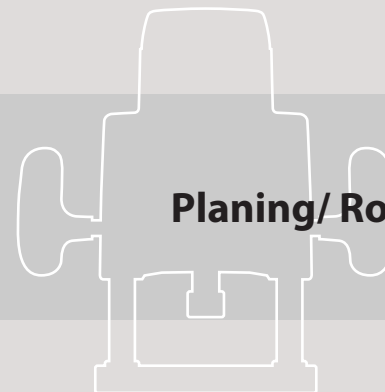

Planing/ Routing

Power Planer

M1902 82mm

411mm

82mm power planer with excellent cost performance



Continuous rating input	500W
Planing Width	82 mm
Planing Depth	1 mm
No Load Speed (RPM)	16,000
Dimensions (L x W x H)	285x157x160mm
Net weight	2.7kg
Power supply cord	2.0m

Shiplapping: 9mm



Planer blade 82, Sharpening Holder Assembly (for unit with resharpenable blade only), Blade gauge assembly, Socket wrench 9, Guide Rule, Dressing stone

Router

M3600 12mm

211mm

Heavy-duty routing expert with powerful 1,650W motor



Continuous rating input	1,650W
Capacity	Collet : 12mm or 1/2"
Plunge Capacity	0 - 60 mm
Base dia.	160x148mm
No Load Speed (RPM)	22,000
Dimensions (L x W x H)	284x148x300mm
Net weight	5.5kg
Power supply cord	2.0m



Straight Guide, Guide holder assembly, Collet sleeve x2, Straight Bit, Wrench, Template guide, Trimmer guide assembly

Router (Plunge type)

M3601 6 mm, 8 mm, 1/4", 3/8"

106mm

6 mm, 8 mm, 1/4", 3/8" Plunge Router



Continuous rating input	900W
Collet Capacity	6 mm, 8 mm, 1/4", 3/8"
Plunge Capacity	0 - 35 mm
No Load Speed (RPM)	27,000
Overall Height	256 mm
Net weight	2.7 kg
Power supply cord	2.0 m



Straight Guide, Straight Bit, Collet Cone, Wrench, Dust Nozzle

Trimmer

M3700 6mm

408mm

Transparent plastic base: Excellent bit visibility, Lightweight, High maneuverability



Continuous rating input	530W
Capacity	Collet : 6mm or 1/4"
Plunge Capacity	0 - 42 mm
No Load Speed (RPM)	35,000
Dimensions (L x W x H)	82x90x199mm
Net weight	1.4kg
Power supply cord	2.0m



Trimmer guide assembly, Straight guide assembly, Template guide, Straight bit 6, Wrench x2, Chip deflector

Blower

M4000

85mm


In-line and ergonomically designed grip for easily applying the nozzle to the target to be blown away.



Continuous rating input	530W
Air volume	1.2-2.9m³/min
No Load Speed (RPM)	8,500-16,000
Dimensions (L x W x H)	427x161x212mm
Net weight	1.5kg
Power supply cord	2.0m



Nozzle assembly, Sash nozzle

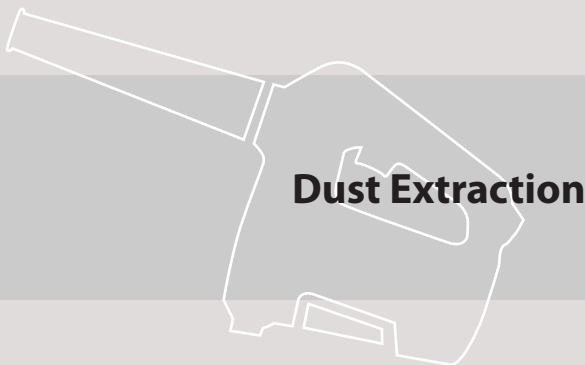

Makita Gulf FZE

P.O.Box 17133, Jebel Ali FZE (South), Dubai - U.A.E.
Tel. (971) 4 8860804 | Fax. (971) 4 8860805 | www.makita.ae

PART NO: (Z)000043 | PRINTED IN U.A.E: "V.19.1"

