



DG001G

Cordless Earth Auger

Powered by 40V max XGT Li-ion battery

High Performance Drilling

with light weight body



Max. Drilling Capacity

ø200 mm

Net Weight (with BL4040)

7.8 kg

XGT
40V Li-ion
max

BL
MOTOR

ADT

XPT

Torque limiter

The torque limiter will actuate when a certain torque level is reached at the low speed setting. The motor will disengage from



the output shaft. When this happens, the drill bit will stop turning.



Reversing switch

enables to extract, in reverse rotation mode, an auger bit jammed in soil with high resistance like clay soil.



Work Amount

depth 600mm / BL4040 / on full battery charge / low speed mode


ø150mm
about **100** holes

ø200mm
about **65** holes

Automatic torque Drive Technology

automatically changes the drilling speed according to load conditions for an optimum operation

ADT

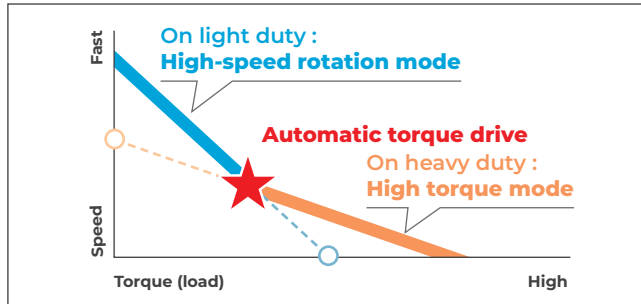

For Larger Holes




























XPT
eXtreme Protection
Technology



BL
MOTOR
High Power
Brushless Motor




ACCESSORIES			
<p>Earth Auger Drill Bit Length: 800mm</p> <p>Part No. E-07294  </p> <p>Part No. E-07303  </p> <p>Part No. E-07319  </p>	<p>Blade for Earth Auger Bit Changing blade for Earth auger drill bit</p> <p>Part No. E-07630  </p> <p>Part No. E-07646  </p> <p>Part No. E-07652  </p> 		
<p>Pin for Earth Auger Drill Part No. E-07331</p>  	<p>Extension bar Part No. E-07325</p> 	<p>Handle Set Part No. 191P11-3 includes a bar which receives reaction force and an auxiliary handle, and helps the user drill holes in the ground easier</p> 	<p>Adapter D Part No. 327687-6 This adapter is required to fit the new Earth Auger Drill bits</p> 

SPECIFICATIONS	
Capacity	Sandy Soil: 200 mm; Clay Soil: 150 mm
No Load Speed (RPM)	High: 0 - 1,500 / Low: 0 - 400
Max Fastening Torque	High: 55 N·m Low: 136 N·m
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	84 dB(A)
Sound Power Level	95 dB(A)
Dimensions (L x W x H)	863 x 605 x 199 mm (with BL4050F)
Net weight	8.1 kg
Standard Equipment: Chuck Key, Hex Wrench, Adapter.	
 Variable Speed	 Mechanical 2-Speed
 Soft Start	 Torque Limiter
 Built-in Job Light	 Reversing
	 Brake



Variants	Battery	Charger	Carry Case
DG001GM204	2pcs of 40V MAX XGT Li-ion 4.0Ah batteries	1pc Fast Charger	NO
DG001GZ04	NO	NO	NO



MAKITA GULF FZE

www.makita.ae |    