



DG002G

Cordless Earth Auger

Powered by 40V MAX XGT Li-ion battery

High Performance Drilling

with light weight body



Max. Drilling Capacity

ø200 mm

Net Weight (without battery)

6.11 kg

XGT
40V Li-ion
max

BL
MOTOR

ADT

XPT

Torque limiter

The torque limiter will actuate when a certain torque level is reached at the low speed setting. The motor will disengage from the output shaft. When this happens, the drill bit will stop turning.



Reversing switch

enables to extract, in reverse rotation mode, an auger bit jammed in soil with high resistance like clay soil.



Work Amount


depth 600mm / BL4040 / on full battery charge / low speed mode

ø150mm
about **100** holes

ø200mm
about **65** holes

Automatic torque Drive Technology

automatically changes the drilling speed according to load conditions for an optimum operation

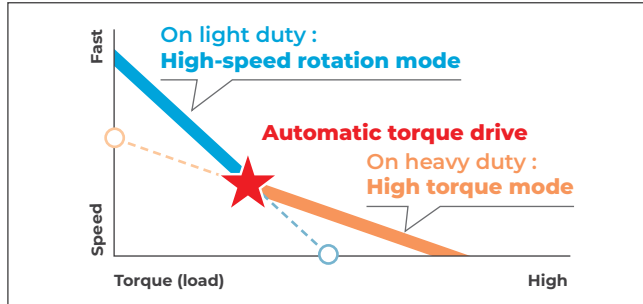

For Larger Holes



Reaction receiver



Auxiliary Handle

Reversing Switch

Auger bit is directly attached

Without using bit adapter, user can attach the auger bits



Twin LED Job Light



Mechanical 2-Speed

- 1 Low speed (0 - 400 min⁻¹)
- 2 High speed (0 - 1,500 min⁻¹)



eXtreme Protection Technology



High Power Brushless Motor



Earth Auger Drill Bit










ACCESSORIES

For Model	Earth Auger Drill Bits & accessories	Bit dia. (mm)	Length (mm)	Working Length (mm)	Note	Part No.
 <p>Earth Auger</p>	 <p>Come with Pin (Pin Part No. E-07331)</p>	50	800	550	High speed drilling	E-13611
		60				E-13627
		80				E-13633
		100				E-07294
		150				E-07303
		200				E-07319
	Extension Bar	—	540	—		E-07325
	 <p>Spare Blade</p>	—	—	—	for Earth auger bit 50x800mm	E-13649
		—	—	—	for Earth auger bit 60x800mm	E-13655
		—	—	—	for Earth auger bit 80x800mm	E-13661
		—	—	—	for Earth auger bit 100x800mm	E-07630
		—	—	—	for Earth auger bit 150x800mm	E-07646
—		—	—	for Earth auger bit 200x800mm	E-07652	

SPECIFICATIONS

Capacity	Sandy Soil: High / Low : 60 / 200 mm Clay Soil: High / Low : 60 / 150 mm
No Load Speed (RPM)	High / Low: 0 - 1,500 / 0 - 400
Max Fastening Torque	High / Low: 55 / 136N·m
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	84 dB(A)
Sound Power Level	95 dB(A)
Dimensions (L x W x H)	881 x 605 x 209 mm
Net weight	6.11 kg (without battery)

Standard Equipment: Hex Wrench.

 Variable Speed	 Brake	 Reversing	 Mechanical 2-Speed	 Torque Limiter
 Soft Start	 Built-in Job Light			



Variants	Battery	Charger	Carry Case
DG002GZ	NO	NO	NO



MAKITA GULF FZE

www.makita.ae |    

MAKITA TOOLS EDITION # 626