



DMC300

Cordless Compact Cut Off

Powered by 18V LXT Li-ion battery


Light weight

1.7 kg

With BL1850B battery
and Dust collect cover
attachment

No load Speed

20,000 rpm



For METAL



For DRYWALLS,
PLASTIC BOARDS,
CERAMIC BOARDS



For TILE



18V
LITHIUM-ION

BL
MOTOR

AFT


XPT

(BRAKE)

Work Amount - (on a full battery charge - BL1860B)	
Metal Cutting Cut off M10 steel rods	Tile Cutting Cut Off 300x5.5mm tiles
About 283 pcs Wheel Used: Cut-off Wheel	About 23 m Wheel Used: Diamond Wheel

Single LED Job Light

- With afterglow function
- Also used as overload display

 (Overload will be notified by blinking)

XPT
eXtreme Protection Technology



Max Cutting Capacity
16mm

Enough cutting depth for cutting thin sheet metals, pipes, etc.


Circumference of grip portion **156mm**

Easy-to-grip small diameter grip for more comfort and control

AFT Active Feedback sensing Technology

- Smart function to minimize the danger of kick-back
- Shuts down the tool if the rotation speed suddenly slows down

Note: The function of AFT is not to prevent the occurrence of kickback for an optimum operation

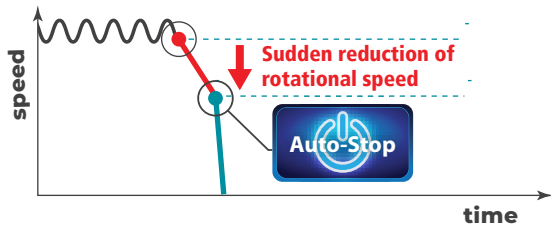

Reverse Switch
enabling to deflect sparks and dust according to working situation




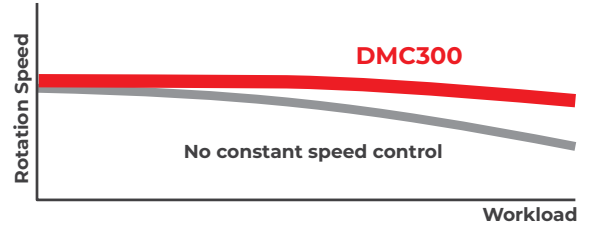






Forward Rotation **F**







Reverse Rotation **R**

Constant Speed Control
minimizes the reduction in blade speed to provide stable cutting





ACCESSORIES			
<p>Dust Collect Cover Attachment Standard Equipment Part No. 122C54-6</p>  <p>Easy-to-use dust collection cover with excellent dust collection performance</p>	<p>Cutting Wheel / Thin Thickness (Cut-off Wheel) Standard Equipment Part No. D-74815-5</p> <p>For Metal</p> 	<p>Tungsten Carbide Grit (Multi Carbide Wheel) Standard Equipment Part No. D-74837</p> <p>For Drywalls, Plastic Boards, Ceramic Boards, Plaster Boards, PVC, Epoxy</p> 	<p>Diamond Wheel / Rim Standard Equipment Part No. D-77263</p> <p>For Tile</p> 

SPECIFICATIONS	
Wheel Diameter	76 mm
Hole Diameter	9.5, 10.0 mm
Wheel Plate Thickness	1.0 mm
No Load Speed (RPM)	20,000
Max Cutting Capacity	with Dust cover attachment: 13.5 mm / without Dust cover attachment: 16.0 mm
Circumference of Grip Portion	156 mm
Dimensions (L x W x H)	224 x 104 x 164 mm (without battery)
Net weight	0.82 kg (without battery)
Standard Equipment: Dust Collect Cover Attachment, Hex Wrench, Diamond Wheel, Cut-off Wheel, Multi Carbide Wheel.	
 Brake	 Constant Speed
 Reversing	 Anti-Restart
 Dust Collection	 Built-in Job Light

VARIANTS
DMC300 RTJ - Comes with 2 pcs of 18V Li-ion 5.0Ah Battery, 1pc Charger in MAKPAC Case
DMC300 Z Without Battery, Charger and Carry Case



MAKITA GULF FZE

www.makita.ae    