



DMP181

CORDLESS INFLATOR

Powered by 18V LXT Li-ion battery




High Pressure Inflation
upto 1,100 kPa

**IDEAL FOR INFLATING TYRES OF
TRUCKS AND LARGE VEHICLES**



Air Discharge Amount [200kPa]
(at High speed mode) **22** L/min



LED job light
for easy operation at dark places



Storing hose
The hose can be attached to the hose holder of the tool



Adapter holder




Backlight



XPT
eXtreme Protection Technology

Digital pressure gauge with backlight

- Easier to read, larger display
- Both current and target pressure values can be simultaneously displayed
- Overheat warning lamp blinks, and the machine automatically turns off

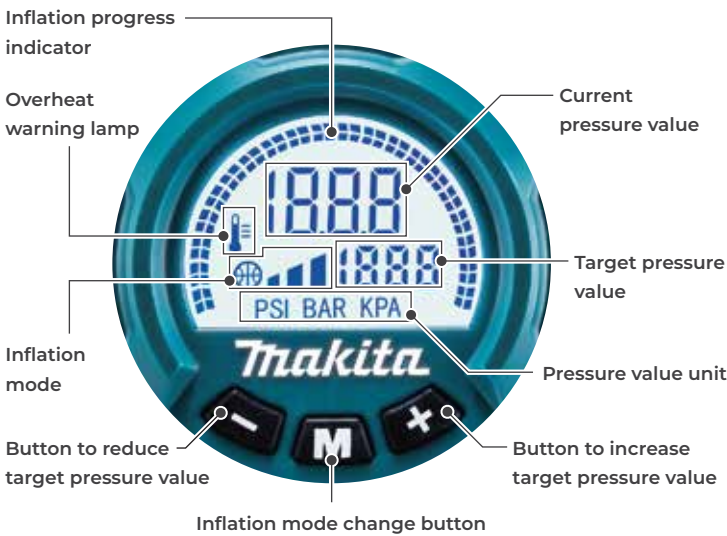


3 Inflation modes

Mode	Display	Purpose	Adjustable pressure range
High speed		To inflate objects in high speed	35 to 1,100 kPa (5 to 160 PSI)
Low speed		To inflate objects in low speed	
Ball		To inflate balls	35 to 110 kPa (5 to 16 PSI)

Air release function

In case of over-inflation, or if user wants to reduce the air pressure of road bike tyres according to road conditions, press and hold the air release button to release air.















Air release button

INFLATING FROM PARTIALLY FULL TO FULL

Object Conditions	Regular Car Tyre	Light Truck Tyre	Medium Truck Tyre
	Size: 215/60R16, 150→250kPa, High speed mode	Size: 205/70R16, 500→600kPa, High speed mode	Size: 225/80R17.5, 700→800kPa, High speed mode
Model (Battery)	BL1860B	BL1860B	BL1860B
Work speed	1.3 min	1.9 min	3.7 min
Work amount on a full battery charge	35 times	18 times	9 times

COMES WITH VALVE ADAPTERS

	Light Truck	Car	Tractor	Bicycle	Road Bike	Ball	Beach ball / Swim ring
Valve shape							
Adapter		American 		British  Part No. TE00000597	French  Part No. TE00000594	For Balls  Part No. TE00000592	For Swim rings/ Beach balls  Part No. TE00000333
Objects Conditions	Light Truck Tyre Size: 205/70R16 0→600kPa High Speed Mode	Regular Car Tyre Size: 215/60R16 0→250kPa High Speed Mode	Tractor Tyre Size: 7 - 14 0→180kPa High Speed Mode	Bicycle Size: 26 inch 0→300kPa Low Speed Mode	Road Bike Tyre Size: 700x23C 0→700kPa High Speed Mode	Ball Tyre Size: 700x23C 0→90kPa Ball Mode	Beach Ball Size: 30cm High Speed Mode
Work speed (approx) (BL1860B)	9 min 40 sec	3 min 30 sec	1 min 50 sec	9 sec	18 sec	39 sec	25 sec
Work amount on a full battery charge (approx) BL1860B	3 times	14 times	25 times	500 times	110 times	230 times	120 times

SPECIFICATIONS	DMP181	DMP180 (old model)
Air Discharge Amount	200 kPa: 22 L/min 700 kPa: 11 L/min	200 kPa: 12 L/min 700 kPa: 8 L/min
Max Air Pressure	1,110 kPa (161 PSI) [11.1 bar]	830 kPa (121 PSI) [8.3 bar]
Hose Length	65 cm	65 cm
XPT	✓	✗
Air Release function	✓ (by manual press and hold button)	✗
Dimensions (L x W x H)	316 x 108 x 231 mm	270 x 76 x 175 mm
Net Weight	2.8 kg	1.8 kg
Standard Equipment: British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter.		
 Electronic 3-Speed	 Built-in Job Light	

Variants	Battery	Charger	Carry Case
DMP181Z	NO	NO	NO



Makita
MAKITA GULF FZE
 www.makita.ae |    