




DTD171

18V Li-ion (LXT) Cordless Impact Driver

4 ASSIST MODE + 4 IMPACT FORCE

To Improve Work Efficiency

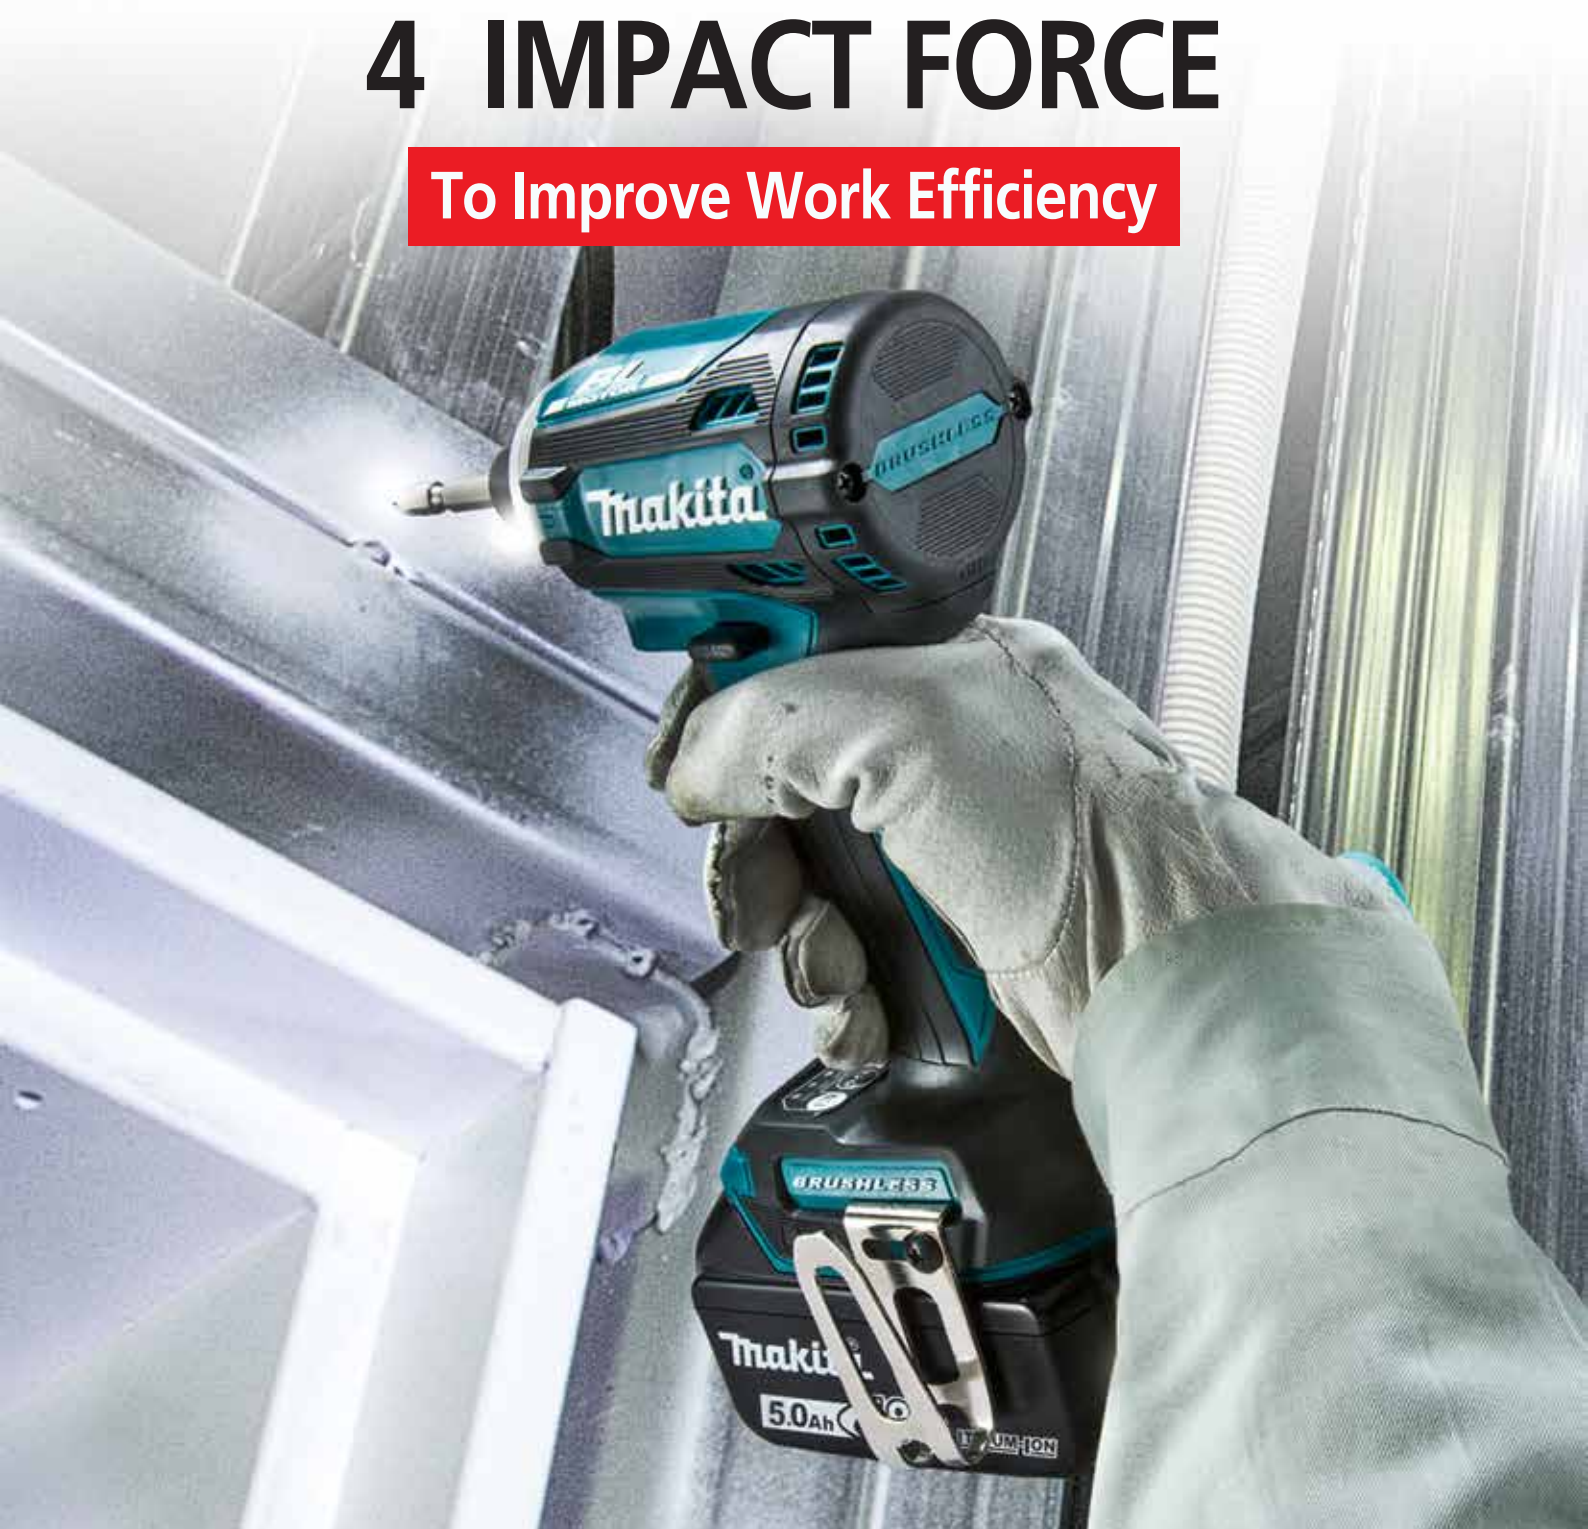

A-mode
Assist mode




Enhanced Anvil holder rigidity

Needle bearing replaced with Ball bearing to reduce bit wobbling



4

Assist Mode (Panel Button)

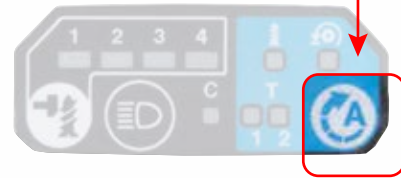

WOOD

Tightening long screws
(0 - 1,800 / 3,800)



The tool drives a screw with low-speed rotation at first. After starting to impact, the rotation speed increases and reaches max speed.

BOLT

Loosening bolts
(0 - 3,600 / 3,800)



This mode helps to prevent a bolt from falling off.

T1

Teks screw thin metal
(0 - 2,900)



Driving self-drilling screws to a thin metal like a metal stud. The tool stops rotating soon after impact starts.

T2

Teks screw thick metal
(0 - 3,600 / 2,600)



Driving self-drilling screws to a thick metal plate with good finish. This mode helps to prevent the screws from breakage and stripping.

4

Changing the impact force (Panel Button)




MAX

(0-3,600/3,800)




HARD

(0-3,200/3,600)




MEDIUM

(0-2,100/2,600)



SOFT

(0-1,100/1,100)



QUICK MODE-SWITCHING FUNCTION (Body Button)



Impact force change with one hand

The level of impact force changes every time you press the quick mode-switching button while holding the grip.

Memory function of impact mode is equipped

If any two modes are registered in advance, you can switch to your desired mode by just pressing quick mode-switching button

Example of Memory function of impact mode

If you register "hard impact mode" and "Teks thin" mode, you can switch from "hard impact mode" to "Teks thin" mode by just one click of the quick mode-switching button



Left-right twin LED job light
with preglow and afterglow functions



One-touch bit installation



Quick mode switching button

Variable speed control by trigger



Max tightening torque: 180N.m

XPT (eXtreme Protection Technology)



Specification

Capacity	Machine Screw : M4 - M8 Standard Bolt : M5 - M16 High Tensile Bolt : M5 - M14 Coarse thread (in length) : 22 - 125 mm
Hex Shank	6.35 mm
No Load Speed (RPM)	Max/Hard/Med/Soft/Wood/Bolt/T (1)/T (2) mode: 0 - 3,600/3,200/2,100/1,100/1,800/3,600/2,900/3,600
Impacts Per Minute (IPM)	Max / Hard / Med / Soft / Wood / Bolt / T (2) mode : 0 - 3,800/3,600/2,600/1,100/3,800/3,800/2,600
Max Fastening Torque	180 N-m
Fastening Torque	Hard / Med / Soft: 170 / 50 / 20 N-m
Dimensions (L x W x H)	116x79x236mm
Net weight	1.6 kg

Standard Equipments: Belt Clip.



Variable Speed



Reversing



Brake



Built-in Job Light

Available Variants

AMPERE	VARIANTS	BATTERIES	CHARGER	MAKPAC STACKING CASE
W/O BATTERY/ CHARGER	DTD171Z	0	0	NO
With 2pcs 5.0Ah battery, 1pc charger & MAKPAC case	DTD171RTJ	2	1	YES



Makita Gulf FZE

www.makita.ae