




DUR192L

18V Li-ion (LXT) CORDLESS GRASS TRIMMER

POWERFUL

LIGHTWEIGHT

ERGONOMIC DESIGN

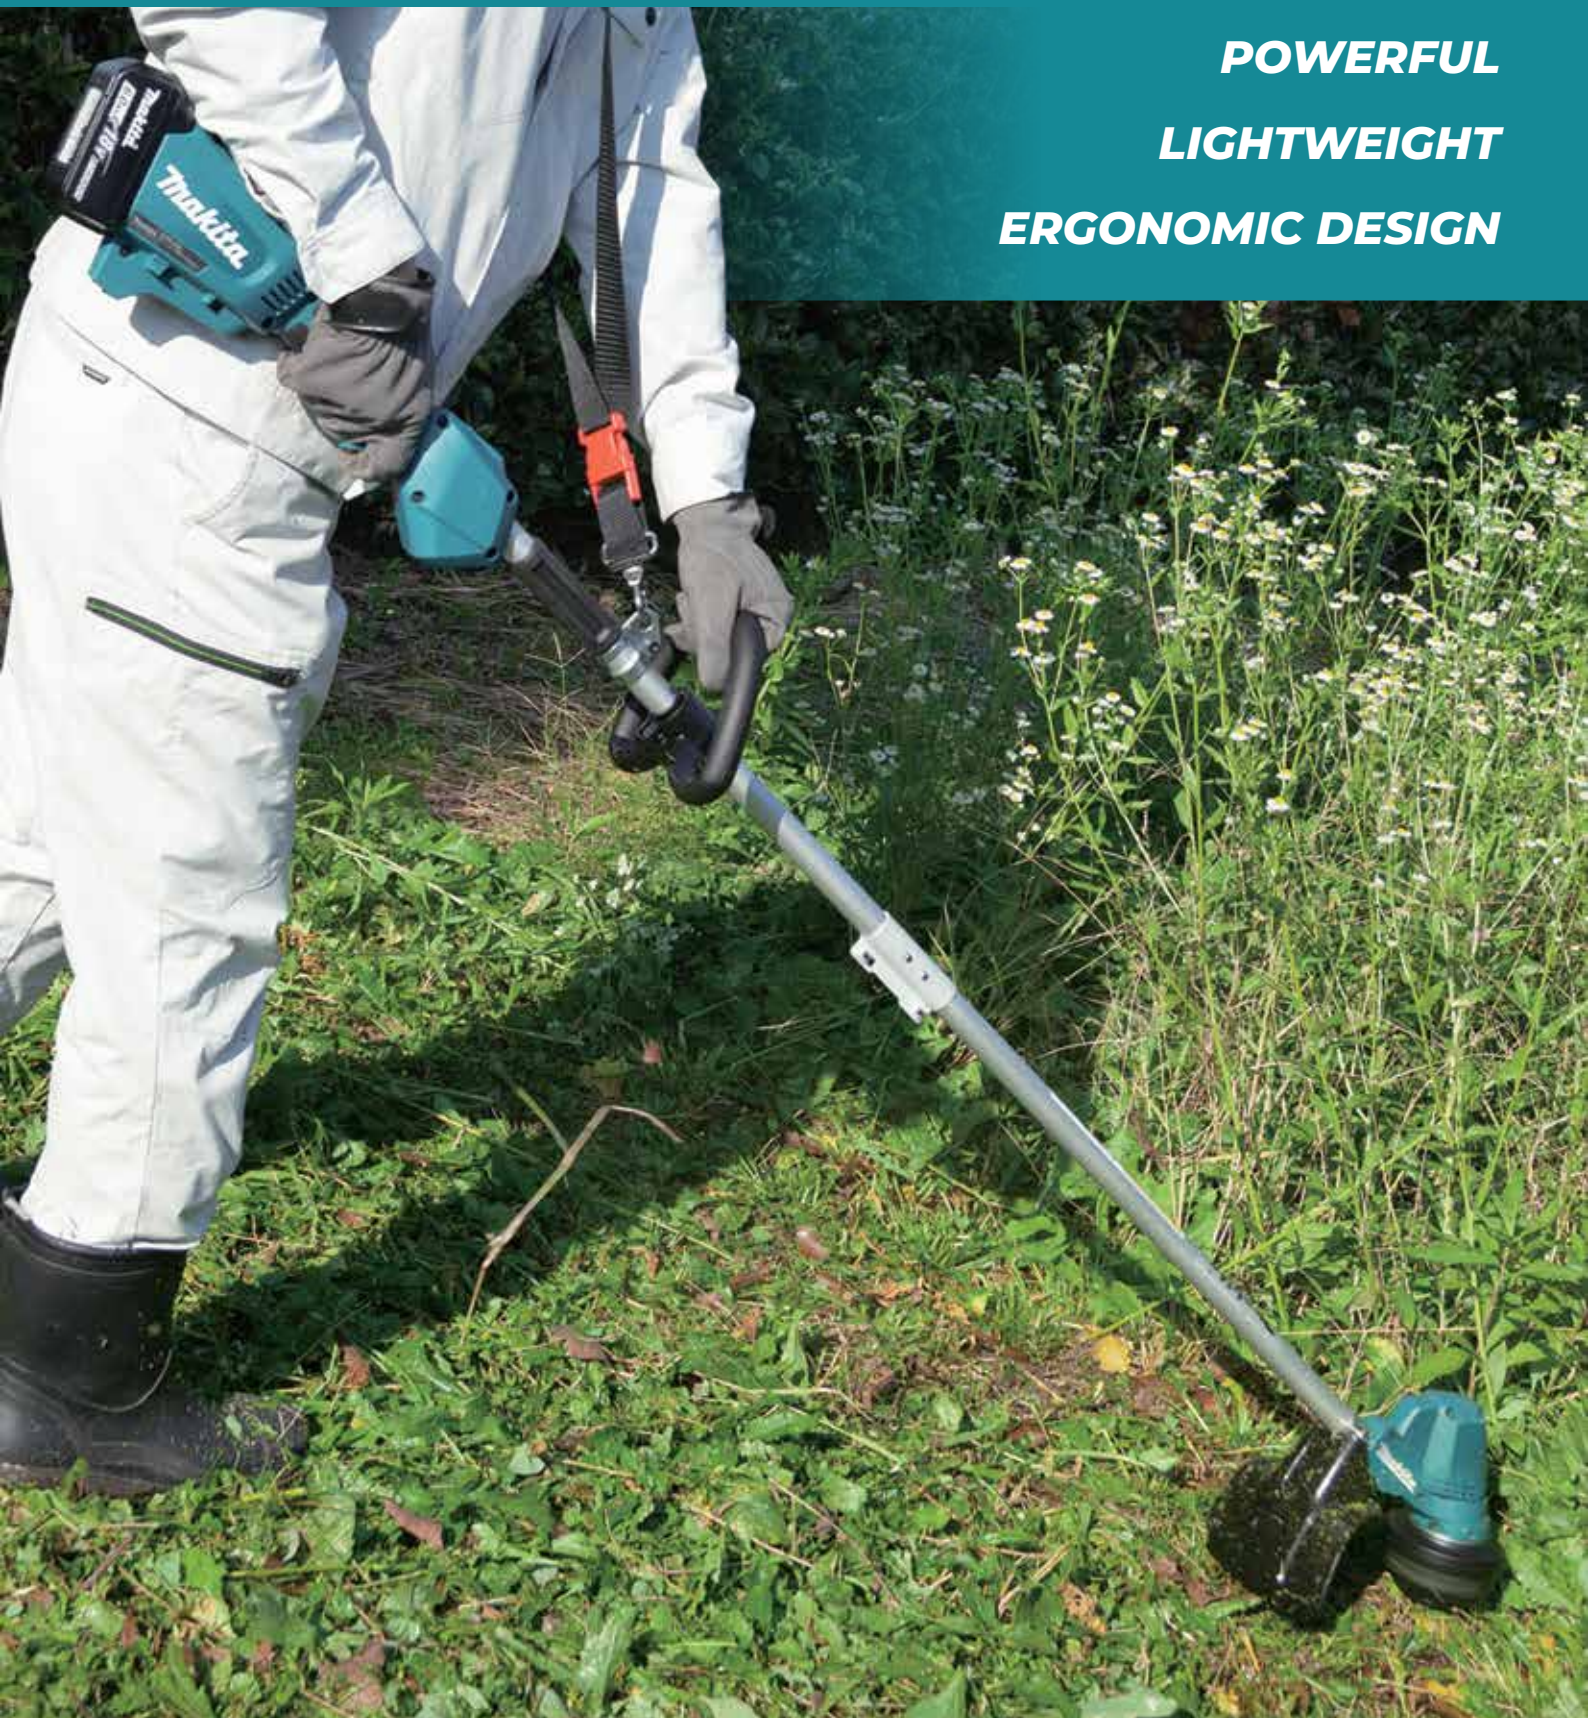

No Load Speed

Max. **6,000** min⁻¹





Brushless DC Motor

Max. 6,000min⁻¹

- Maintenance-free due to no brush
- Energy production is more efficient than brushed DC motor because of no friction loss caused by brushes, enabling to lower amperage for reduced heat production and increased work amount on a single full battery charge



Extreme Protection Technology

Enhanced Dust and Drip-resistant Performance ensure reliable operation even under bad weather



Simple switch specifications




2 Speed settings

Variable speed control by trigger

Assembling type shaft

- The assembling type trimmer is folded and then packed as shown below, making this trimmer suitable for online delivery or space saving storage and display at retailer
- Once the shafts are connected by the user, they cannot be disconnected



M10 nut for holding cutting tools

Specialized for use with nylon cutting head only

LIGHT WEIGHT

3.0kg

Battery: BL1850B

RUN TIME*

High Low

46/97

Battery: BL1850B

*No load continuous run time (approx.) : min

ACCESSORIES (Standard Equipment)

Bump & Feed

Image	Ref.	Size	Threaded Size	Cord / Line	Part No.
	95 - M10L	4"	M10 x 1.25LH	Ø2.0mm x 3m	198893-8

Protection Guard for Trimmer Head

Image	Type	Description	Part No.
	Exclusive	Without Cord / Line Cutter	412580-8

OPTIONAL ACCESSORIES

Quick Bump & Feed

Image	Ref.	Size	Threaded Size	Cord / Line	Part No.
	96 - M10L	4"	M10 x 1.25LH	Ø2.0mm x 4m	191D89-4

Nylon Cord (String) - Four Leaf Clover like Cross Section

Type	Size	Part No.
<ul style="list-style-type: none"> 2mm - well suited for use with high powered battery operated line trimmers The new nylon cord features more sharpness, about 10% less noise, and about 15% less power consumption compared with the current one Less jamming in bump & feed head due to rounded profile 	<p>Spiral cord body with four-leaf clover-like cross section developed for better cutting performance</p>  <p>Spiral cord body</p> <p>Four-leaf clover like cross section</p>	<p>Ø2.0mm x 15m</p> <p>197472-9</p>

SPECIFICATIONS

Cutting Width	300 mm (11-3/4")
No Load Speed (RPM)	High / Low: 0 - 4,500 / 0 - 6,000
Spindle Size	M10 x 1.25 LH
Max Run Time (min)	High / Low, w/ 300 mm Nylon Cutting Head, w/ Load: 18 / 34 (w/ BL1850B) High / Low, w/ 300 mm Nylon Cutting Head, w/o Load: 46 / 97 (w/ BL1850B)
Sound Pressure Level	74.8 dB(A)
Sound Power Level	87.8 dB(A)
Vibration Level	Front / Rear: 2.5 / 2.5 m/s ² or less
Dimensions (L x W x H)	w/o Nylon Cutting Head: 1,670 x 186 x 246 mm
Net weight	3.0 kg

Standard Equipment: Safety Goggles, Shoulder Strap Assembly, Protection Guard, Nylon Cutting Head.

 Variable Speed
  Brake
  Electronic 2-Speed
  Constant Speed
  Soft Start

AVAILABLE VARIANTS

Variants	Battery	Charger	Carry Case
DUR192LRT	1pc of 5.0Ah, 18V LXT Li-ion batteries	YES (1pc)	NO
DUR192LZ	NO	NO	NO



MAKITA GULF FZE

www.makita.ae    