



HM1511

Electric Breaker (30mm Hex Shank)

HIGH POWER AND LOW VIBRATION

ANTI-VIBRATION HOUSING,
ACTIVE DYNAMIC VIBRATION ABSORBER
AND SOFT NO-LOAD
KEEP THE VIBRATION LOWER

IMPACT ENERGY

48.9 J

VIBRATION LEVEL
(at main handle)

6.5 m/s²

AVT *SOFT
NOLOAD*

HIGH POWER AND LOW VIBRATION

Thanks to completely redesigned hammering mechanism and increased motor power as compared with predecessor model, higher power is achieved with minimum increase in tool size and weight




SOFT NO LOAD

Suppression of motor speed during no-load



Under Load



During No-Load

30mm Hex Shank

Soft Start

Breaker starts smoothly then rapidly accelerates to maximum speed to reduce the initial start-up shock


Slide Switch

Anti Vibration Housing

Active Dynamic Vibration Absorber

Side Handle

Can be swung 360° on the vertical and secured at any desired position, providing complete control in any application

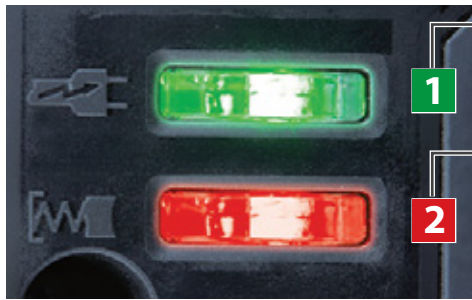

1 Power-On Indicator Lamp

2 Service Indicator Lamp

Hammer Trolley (Optional Accessory)
Part No. D-54972



Carrying Case (Standard Equipment)



SPECIFICATIONS


Continuous rating input	1,850W
Impact Energy	EPTA: 48.9 J
Blows Per Minute (BPM)	1,300
Sound Pressure Level	85 dB(A)
Sound Power Level	105 dB(A)
Vibration Level	Chiselling Function w/ Side Handle: 6.5 m/s ²
Dimensions (L x W x H)	781 x 130 x 266 mm
Net weight	19.2 kg
Power supply cord	5.0 m

Standard Equipment: Side Handle.

- Double Insulation
- 30mm Hex Shank
- Soft Start
- Carrying Case

ACCESSORIES

Dust Extractor Attachment Set
Part No. 191M21-2

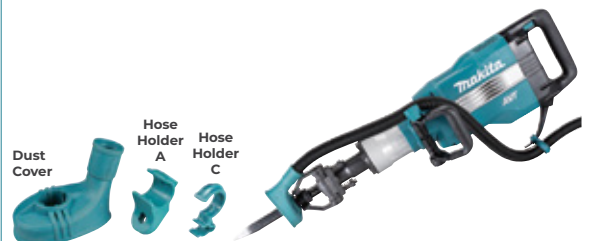

MAKITA GULF FZE

www.makita.ae