



HR008G

Cordless Combination Hammer (30mm)

Powered by 40V MAX XGT Li-ion battery



Adapted for SDS-PLUS bits



PRODUCT VIDEO

HIGH EFFICIENCY

using 40V MAX XGT battery as the power source



3 Mode

Rotation

Rotation
+
Hammering

Hammering

Impact Energy
[EPTA-Procedure 05/2009]

3.9 Joule

Work Speed
ø 10.5mm

5.0 sec

Battery: BL4040

XGT

40V Li-ion
max

BL
MOTOR

AFT

AWS

AVT

XPT

High efficiency Brushless DC motor

Dust Extraction System for effective cleaning with HEPA Filter to capture concrete dust during drilling
Overall Length: 265mm




Anti-Vibration Technology

Equipped with anti-vibration main handle and side handle to reduce vibration to operator's hands for less hand and arm fatigue from long continuous operation.


AVT

Low Vibration
Hammer drilling into concrete

9.1

 m/s²


Counterweight for back-and-forth motion
Counterweight to cancel the back-and-forth vibration caused by hammering



Counterweights for rotary motion
Counterweight to cancel the vibration caused by imbalanced rotation of crankshaft


Drilling Performance		
Drilled holes to a depth of 60mm at 10kg pressing load Concrete with compressive strength of 40N/mm ² BL4040 / on full battery charge		
<p>ø10.5mm (3/8")</p> <p>5.0 sec</p>	<p>ø16.0mm (5/8")</p> <p>9.1 sec</p>	<p>ø20.0mm (13/16")</p> <p>17.1 sec</p>

XPT eXtreme Protection Technology




AFT Active Feedback sensing Technology

turns the motor OFF, if bit rotation is suddenly forced to stop

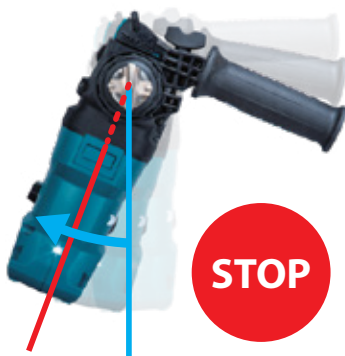

AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth.
The vacuum cleaner automatically runs while the switch is ON

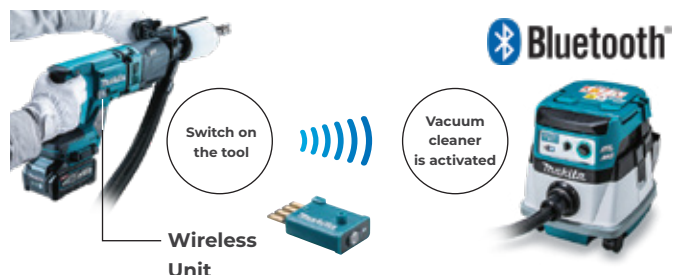

OPTIONAL ACCESSORIES

Dust Extraction System

Compatible with long bits

DX10 (Dust collection is available for bits with an overall length of up to 265mm)

Part No. **191F95-1**

Depth gauge for increased drilling consistency

Filter cleaning mechanism by turning the dial, the dust falls off from the filter

Transparent dust case for easy checking of collected dust amount

Easy disposal of dust and easy cleaning of dust case thanks to:

- Dust case cover easy to open/close with a single operation of a locking tab
- Wide opening of dust case

Dust case body is equipped with a fan for dust collection

HEPA filter

Equipped with HEPA Filter which removes particles with an efficiency rating of 99.75% from the air passing through

Dust Cup Attachment

Part No. **195173-3**



Dust Case Set

Part No. **191F49-8**



Filter Set

Part No. **199557-7**



Spacer Set

Part No. **191L91-5**



Hook set

Part No. **191W90-3**



Hammer Service Kit

Part No. **1910R8-2**



SPECIFICATIONS

Impact Energy	EPTA-Procedure 05/2009: 3.9 J
Capacity	Concrete (w/ TCT Bit): 30 mm, Steel: 13 mm, Wood: 32 mm, Core Bit: 80 mm
Blows Per Minute (BPM)	0 - 4,500
No Load Speed (RPM)	0 - 840
Vibration Level	Hammer Drilling into Concrete: 9.1 m/s ²
Sound Pressure Level	94 dB(A)
Sound Power Level	105 dB(A)
Dimensions (L x W x H)	396 x 97 x 242 mm
Net weight	4.5kg (without battery)

Standard Equipment: Side Grip, Depth Gauge.

Variable Speed	Constant Speed	Torque Limiter	Reversing	Brake
Dust Collection	SDS-PLUS Shank	Built-in Job Light	Carry Case	



Variants	Battery	Charger	Carry Case
HR008G Z01	NO	NO	NO
HR008G M201	2pcs of 40V MAX XGT Li-ion 4.0Ah batteries	YES	YES



MAKITA GULF FZE

www.makita.ae |