



HW001G

Cordless High Pressure Washer

Powered by 40V MAX XGT Li-ion Battery



PRODUCT VIDEO

GOOD MOBILITY AND TRANSPORTABILITY

High washing power similar to 120 bar corded models

Max. Permissible Pressure

11.5 MPa





ADJUSTABLE PRESSURE FUNCTION WITH 3 MODES FOR WIDE RANGE OF CLEANING APPLICATIONS





LONGER RUN TIME IS ACHIEVED WITH PARALLEL BATTERY FUNCTION

HIGH AND OPTIMAL BALANCE BETWEEN DISCHARGE PRESSURE AND WATER FLOW ALLOWS EFFECTIVE CLEANING OF BOTH HARD TO REMOVE DIRT AND DELICATE DIRT WITH EASE

Mode	Regular Pressure	Regular Flow Rate	Continuous Use (approx) on fully charged batteries	Applications
Mode 1	3.0 (MPa)	3.0 (L/min)	60 min.	Light washing work
Mode 2	5.5 (MPa)	4.2 (L/min)	30 min.	Washing of vehicles, farm equipment, etc.
Mode 3	8.5 (MPa)	5.5 (L/min)	18 min.	Washing of building exterior, etc.

All the values mentioned are with Variospray Nozzle and TWO BL4050F batteries

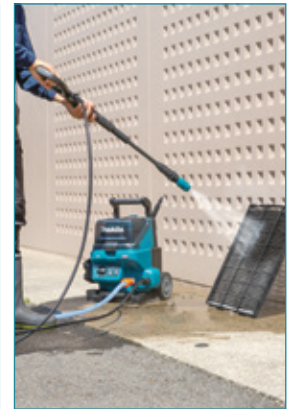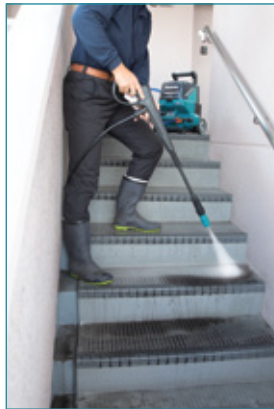

SELF-PRIMING FUNCTION

Water can be supplied not only from faucet but also from water reservoirs, such as poly tanks, large buckets, using this function

Max Suction Height : **1m**

Minimal Water Level : **15m**

NO NEED TO OPERATE DRAIN VALVE



IPX5

Rated For Air and Water Resistance



Good Mobility and Transportability

Large diameter wheels Equipped with ø140mm wheels, allowing for good mobility even on bumpy road surfaces.



ACCESSORY STORAGE

Side Section:

Trigger gun

Rear section:

High Pressure Hose, Foam Nozzle, Lance



Telescopic Handle

For easy transportation and storage




VARIOUS NOZZLES



Cyclone Jet Nozzle Set
Part No. 197824-4
(standard equipment)

A spiral jet is ejected. Suitable for removing stubborn dirt.

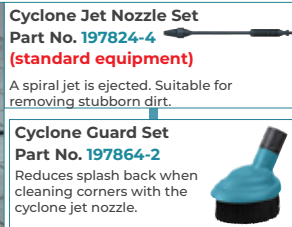

Cyclone Guard Set
Part No. 197864-2
(standard equipment)

Reduces splash back when cleaning corners with the cyclone jet nozzle.



Variospray Nozzle Ext. Set
Part No. 1912Y5-9 (NEW)
(standard equipment)

Variospray Nozzle
Part No. 1912Y4-1 (NEW)

Jet pressure can be adjusted by rotating the nozzle.



Variospray Lance Set
Part No. 1912Y6-7 (NEW)

Jet pressure can be adjusted by rotating the nozzle.



Variable Nozzle Set
Part No. 197822-8


Jet width can be adjusted from 0° to 25° by rotating the front end of the nozzle.



Foam Nozzle Set
Part No. 1912Y2-5 (NEW)

New foam nozzle with improved foaming performance.

Detergent can be sprayed as foam.




Wash Brush Set
Part No. 197828-6

A nozzle equipped with a brush. Useful for washing out dirt while scrubbing with brush.



Rotating Brush Set
Part No. 197831-7

Three brushes inside rotate slowly when ejecting the jet. Suitable for cleaning light dirt on an exterior wall, car body, bath tub, etc.



Under body Spray Lance Set
Part No. 197859-5

An extra long spray lance with angled nozzle. Best for cleaning hard-to-reach areas such as car under body and roof gutter.

Extension Pipe Set Part No. 197870-7



Pipes to extend the length of the trigger gun. Three different lengths are available by changing the number of the pipes to be used.

Accessory Joint Set Part No. 197853-7



A joint to connect with a nozzle from other model.



Absorption Connector Set Part No. 197881-2 **(standard equipment)**

With Filter



Pipe Cleaning Hose Part No. 197837-5 (10m) Part No. 197840-6 (5m)

For cleaning and unclogging plumbing and downpipes



Trigger Gun Set Part No. 197842-2 **(standard equipment)**



High Pressure Extension Hose Part No. 197845-6 (5m) Part No. 197847-2 (8m) Part No. 197850-3 (10m)

Extension hose to connect the high pressure washer body with the trigger gun



High Pressure Hose Part No. 126766-5 **(standard equipment)**

Length: 5m



(can be connected directly to the machine)

Twist Prevention Joint Set Part No. 197867-6



(optional attachment)

Prevents the high-pressure hose from being twisted.

Hose Assembly Set Part No. 1910R1-6 **(standard equipment)**

Length: 3m

A hose assembly to connect a faucet to the product, or the strainer assembly to the product.



One Touch Joint Set Part No. 197883-8

For commercial hose connection

Strainer Assembly Set Part No. 1910R2-4 **(standard equipment)**

A strainer assembly to supply water from a tank or reservoir. Use the hose assembly to connect to the product.



Self-suction Hose Set Part No. 197873-1

Replace the water hose with this set to supply water from a tank or reservoir.



SPECIFICATIONS

Max. Flow Rate	7.0 L/min
Regular Flow Rate	Mode 1/ 2/ 3: 3.0/ 4.2 / 5.5 L/min
Max Permissible Pressure	11.5 MPa
Regular Pressure	Mode 1/ 2/ 3: 3.0/ 5.5 / 8.5 MPa
Max Feed Temperature	40 °C
Max Suction Height	1 m
Max Run Time	w/ BL4050F x2: Mode 1/ 2/ 3: 60/ 30/ 18 min
Hose Length	5 m
Noise level	84 dB(A)
Dimensions (LxWxH)	334 x 383 x 520mm
Net weight	8.5 kg (without battery)

Electronic 3-Speed

Anti-Restart

VARIANTS

HW001GZ

Battery : NO
Charger : NO
Carry Case : NO



MAKITA GULF FZE

www.makita.ae

MAKITA TOOLS EDITION # 636