



PC5010C
Concrete Planer (125mm)

COMPACT & LIGHT WEIGHT
BUT PROVIDES **HIGH TORQUE WORK**
and allows for **SUPERIOR HANDLING**
IN HORIZONTAL AND OVERHEAD
APPLICATIONS



ENGINEERED FOR
FAST MATERIAL REMOVAL
WITH LOW VIBRATION

Light Weight

at **2.5** kg

Powerful

1400W

(1,400W= Continuous Rating
Power Input)

Variable Speed

4,000 - 9,000_{min-1}



COMPACT & LIGHT WEIGHT

BUT PROVIDES HIGH TORQUE WORK



SJSII provides a drive mechanism that is engineered to reduce vibration for increased comfort

Constant Speed Control automatically applies additional power to maintain speed under load

Soft Start suppresses start-up reaction for smooth start-ups and longer gear life

Ergonomically Designed Grip

Variable Speed Control by dial



also indicates as power supply lamp



Comfortable Loop Handle

Soft Brushes help prevent dust from escaping and help move the tool over the surface

Removable front cover enables to plane flush to walls or corners

Dust Collection needs to connect with Vacuum Cleaner to extract the dust

Anti-Restart Function

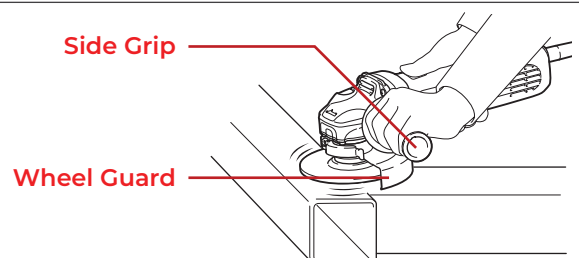
- Prevents accidental start-up even if the tool is plugged to power source with the switch "ON"
- Blinking red LED at the rear cover warns that Anti-restart function has been activated






WHEN USING AS ANGLE GRINDER

This tool can be used as a 125mm Angle Grinder by removing the loop handle and dust cover assembly.

When using the tool as a grinder, use the optional accessories like side grip and wheel guard.









Offset Diamond Wheels

Part No.	Image	Application	D	T	X	H	Colour
B-12289		Fine Work • For fine finishing • Rim type	125	13.5	4	22.23	GOLD
B-12295		Standard Work • For coarse grinding work • For removing paint • Double Type	125	8	5	22.23	GOLD
B-53160		PCD Offset • For removal of polyurethane, adhesive, paint, epoxy and acrylic coatings	125	-	-	22.23	BLACK

SPECIFICATIONS

Continuous rating input	1,400W
Wheel Diameter	125 mm (5")
Hole Diameter	22.23 mm (7/8")
No Load Speed (RPM)	4,000 - 9,000
Vibration Level	Surface Grinding w/ Loop Handle: 5.5 m/s ²
Dimensions (L x W x H)	350x231x179 mm
Net weight	2.5 kg
Power supply cord	4.0 m (13.1 ft)

Standard Equipment: Lock Nut Wrench.

-  Double Insulation
-  Variable Speed
-  Soft Start
-  Constant Speed
-  Dust Collection
-  Metal Carrying Case

DUST COVER ASSEMBLY

125mm Dust Cover Assembly
(Standard Equipment)
Part No. [195237-3](#)

