



SK105D / SK105GD / SK106D / SK106GD  
Laser Series powered by 12V Li-ion CXT Batteries




## Line beam brightness selection (Bright mode and Eco mode)

### Rechargeable **Red** Cross Line Laser

Cross line + Point


SK106D



2 - LINES (Horizontal line / Vertical line)  
4 - POINTS (Left/Right/Upper/Lower directions)

Cross line

SK105D




2 - LINES (Horizontal line  
and Vertical line)

### Rechargeable **Green** Cross Line Laser

Cross line + Point


SK106GD



2 - LINES (Horizontal line / Vertical line)  
4 - POINTS (Left/Right/Upper/Lower directions)

Cross line


SK105GD



2 - LINES (Horizontal line  
and Vertical line)


## High brightness green laser (SK105GD/SK106GD)

for increased visibility at bright site

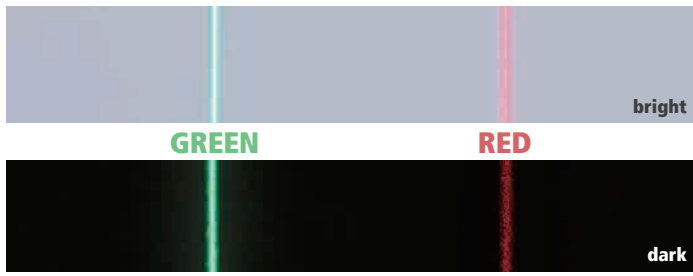

## Levelling accuracy

$\pm 3\text{mm}/10\text{m}$

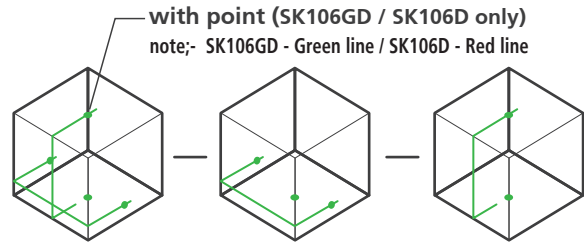

Highly protected laser windows are recessed for increased durability

Rubberized molding house for increased protection



Laser line selection and on / off switch

Brightness indicator

Bright  
▼  
Eco mode

## Pendulum lock



Lock switch

Pendulum lock enables slope incline applications for increased versatility



## DC Jack

Allows to be charged from LXT batteries by using USB adapter ADP05 and power supply cable



Power cable (part no: 199178-5) and batteries are optional

## Long continuous operation

SK106GD / SK105GD

SK106D / SK105D

**10/10h**  
BL1021B  
2.0Ah

**20/20h**  
BL1041B  
4.0Ah

**20/20h**  
BL1021B  
2.0Ah

**40/40h**  
BL1041B  
4.0Ah

# XPT

Extreme Protection Technology

For use in outdoor applications or harsh environments, protection from dust and dripping water is enhanced

SPECIFICATIONS	SK105GD	SK105D	SK106GD	SK106D
Laser	Cross line Laser	Cross line Laser	4 point - Cross line Laser	4 point - Cross line Laser
Colour	Green	Red	Green	Red
Measuring range	Up to: 35 m	Up to: 25 m	Up to: 35 m	Up to: 25 m
Measuring range w/ detector	Up to: 80 m	Up to: 80 m	Up to: 80 m	Up to: 80 m
Levelling accuracy	±3 mm / 10 m	±3 mm / 10 m	±3 mm / 10 m	±3 mm / 10 m
Self-levelling range	±4°	±4°	±4°	±4°
Laser fan angle (Horizontal / Verticale)	180° / 160°	180° / 160°	180° / 170°	180° / 170°
Number of laser lines	2	2	2	2
Number of laser Ponto	-	-	4	4
Laser type (Laser class 2)	525 nm	635 nm	525 nm	635 nm
Operating temperature	-10 to 50 °C	-10 to 50 °C	-10 to 50 °C	-10 to 50 °C
Dimensions (L x W x H)	157x64x102 mm	157x64x102 mm	157x64x102mm	157x64x102mm
Net weight	0.84 kg	0.84 kg	0.85kg	0.85kg

## STANDARD EQUIPMENTS

Adapter with magnet (Standard Equipment)



Target plate (Standard Equipment)



Soft bag (Standard Equipment)



## AVAILABLE VARIANTS

AMPERE	VARIANTS	BATTERIES	CHARGER	CARRY CASE
W/O BATTERY/ CHARGER	SK105GDZ / SK105DZ	0	-	-
	SK106GDZ / SK106DZ	0	-	-

