



# UR003G

**XGT Cordless Grass Trimmer (Offset bike handle)  
Powered by 40V MAX Lithium-Ion Battery**

## High power as 25mL engine tool

Work amount about **290m<sup>2</sup>** on a single full battery charge  
(depends on the condition of battery, the type of grass, season, etc.)

## Outer Rotor BL Motor provides high operating efficiency

Direct drive system for more power, more speed and longer run time



**6,500**min<sup>-1</sup>  
High rotation speed

**Longer run time**  
**45 / 80 / 259 min.**  
High Med Low  
(with Nylon cutting head and 5.0Ah battery)

**NO**

- Gas
- Emissions
- Oil Mixing
- Pull Starts

Less Maintenance  
Low Noise






# ADT

## Automatic torque Drive Technology


Automatically changes the cutting speed according to grass density

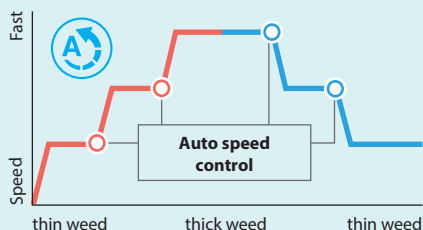

# AFT

## Active Feedback sensing Technology

Electronically turns off the motor if rotation of bit is suddenly forced to stop

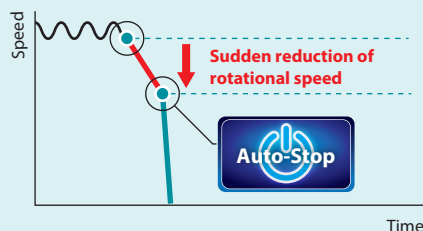

## Multi functional control panel: near right hand position for easy access and operation



Electronic 3-speed operation mode can be selected to suit the type of blade

## Reverse button / ADT



Reverse switch for clearing entangled weeds and grass from cutting head

Large push button main power switch: allows for easy on/off even with gloved hand



Toolless handle lock mechanism for good portability



## Wet Guard / IPX4

High water-resistance allows to operate the machine even if it is wet with water

## Extreme Protection Technology

Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather

## Equipped with:

**Constant speed control** - automatically applies additional power to the motor to maintain speed under load

**Soft start** - for smooth start-ups

**Electric brake** - for increased operator safety

## Specification

<b>Cutting Width</b>	Metal Blade: 230 mm Nylon Cutting Head: 350 mm Plastic Blade: 255 mm
<b>No Load Speed (RPM)</b>	High / Mid / Low: 0 - 6,500 / 5,300 / 3,500
<b>Spindle Size</b>	M10 x 1.25 LH
<b>Sound Power Level</b>	Nylon Cutting Head: 89.7 dB(A)
<b>Sound Pressure Level</b>	Nylon Cutting Head: 72.2 dB(A)
<b>Vibration Level</b>	Left / Right: 2.5 / 2.5 m/s <sup>2</sup> or less
<b>Dimensions (L x W x H)</b>	1735 x 355 x 230 mm
<b>Net weight</b>	3.4 kg (without battery)

## Available Variants

VARIANTS	MODELS	BATTERY	CHARGER	MAKPAC STACKING CASE
BARE TOOL	UR003G Z	-	-	-

## Portable Power Pack units

PDC1200 (optional)



Charger - DC4001  
Part # 191L08-8

PDC01 (optional)



XGT Adapter to connect Portable power pack and 40Vmax XGT tools (optional)  
Part # 191N62-4



## Accessories

Quick loading Bump & Feed (optional)  
4" - 2.0mm x 4m : 191D89-4



Bump & Feed (optional)  
4" - 2.0mm x 3m : 197804-0  
4" - 2.0mm x 2m : 198893-8



Metal blade (optional)  
4 tooth  
230mm : B-14118



Plastic blade (optional)  
230mm : 198383-1  
(Replacement plastic blade 12pcs. set: 198426-9)



Protection guard (standard) (for cutting blades) 197294-7



MAKITA GULF FZE

www.makita.ae |    