



ADP001G


XGT Adapter (for charging mobile devices)
Powered by 40V MAX Lithium-Ion Battery

Charge your device anytime at anywhere
with ADP001G Adapter and XGT Li-ion Battery



Compact and lightweight

- Charges Mobile phone, Tablet, USB equipped fan, Light, etc.
- Compatible with iOS and Android devices.
- Powered by all Makita 40V MAX XGT Li-Ion batteries.

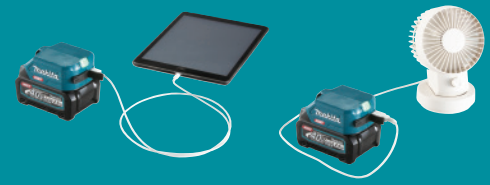

Strap hole

On/Off Switch



- Push button type ON-OFF switch enables on/off control of USB output. (LED indicator is on in green while the switch is on)

Auto-off function

Adapter automatically turns off the USB output power after charging the devices continuously for 30 minutes.

Dual USB ports enable convenient charging of two mobile devices on the jobsite



Rubber covers protect USB ports from dust and water

Each USB port is equipped with Type A - DC5V / 2.4A output

Specification

USB port	2 (A type)
Max USB output current A	One port: 2.4 Two ports: 4.8
Dimensions (L x W x H)	96 x 76 x 40 mm (without Battery)
Net weight	0.14 kg (without Battery)

Runtime : Number of times iPhoneXR can be recharged

- BL4020 (2.0Ah): 2.8 times
- BL4040 (4.0Ah): 5.6 times
- BL4050F (5.0Ah): 7.0 times

Note:- Values are calculated at a fully charged XGT battery on a fully drained iPhone XR mobile device.

All values are approximate and can vary depend on the type of mobile devices.



Available Variants

VARIANTS	MODELS	BATTERY	CHARGER	CASE
BARE UNIT	ADP001G Z	-	-	-



MAKITA GULF FZE

www.makita.ae |    