



**DDG461**

**Cordless Earth Auger**

Powered by 18+18V LXT Li-ion battery

# High Performance Drilling

with light weight body



Max. Drilling Capacity  
**ø200 mm**

Net Weight (without battery)  
**6.24 kg**

**18v + 18v → 36v** **BL MOTOR** **ADT** **XPT**



**Torque limiter**

The torque limiter will actuate when a certain torque level is reached at the low speed setting. The motor will disengage from the output shaft. When this happens, the drill bit will stop turning.



+

**Reversing switch**

enables to extract, in reverse rotation mode, an auger bit jammed in soil with high resistance like clay soil.



**Work Amount**

depth 600mm / BL1860B x 2 / on full battery charge / low speed mode


ø150mm  
about **155** holes

ø200mm  
about **90** holes

**Automatic torque Drive Technology**

automatically changes the drilling speed according to load conditions for an optimum operation

**ADT**

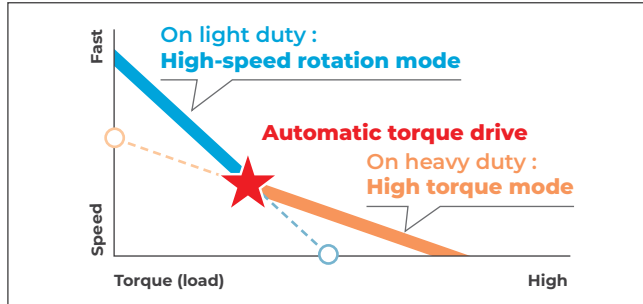

**For Larger Holes**



**Reaction receiver**




**Auxiliary Handle**



**Reversing Switch**

**Twin LED Job Light**



**Auger bit is directly attached**

Without using bit adapter, user can attach the auger bits



**Mechanical 2-Speed**

- 1 Low speed (0 - 400 min<sup>-1</sup>)
- 2 High speed (0 - 1,500 min<sup>-1</sup>)



**XPT**

eXtreme Protection Technology



**BL MOTOR**



High Power Brushless Motor



**Earth Auger Drill Bit**










## ACCESSORIES

For Model	Earth Auger Drill Bits & accessories	Bit dia. (mm)	Length (mm)	Working Length (mm)	Note	Part No.
 <p><b>Earth Auger</b></p>	 <p>Comes with Pin (Pin Part No. E-07331)</p>	50	800	550	High speed drilling	E-13611
		60				E-13627
		80				E-13633
		100				E-07294
		150				E-07303
		200				E-07319
	Extension Bar	—	540	—		E-07325
	 <p>Spare Blade</p>	—	—	—	for Earth auger bit 50x800mm	E-13649
		—	—	—	for Earth auger bit 60x800mm	E-13655
		—	—	—	for Earth auger bit 80x800mm	E-13661
		—	—	—	for Earth auger bit 100x800mm	E-07630
		—	—	—	for Earth auger bit 150x800mm	E-07646
—		—	—	for Earth auger bit 200x800mm	E-07652	

## SPECIFICATIONS

Capacity	Sandy Soil: High / Low : 60 / 200 mm Clay Soil: High / Low : 60 / 150 mm
No Load Speed (RPM)	High / Low: 0 - 1,400 / 0 - 350
Max Fastening Torque	High / Low: 48 / 136 N·m
Vibration Level	2.5 m/s <sup>2</sup> or less
Sound Pressure Level	84 dB(A)
Sound Power Level	95 dB(A)
Dimensions (L x W x H)	840 x 607 x 223 mm
Net weight	6.24 kg(without battery)

### Standard Equipment: Hex Wrench.

 Variable Speed	 Brake	 Reversing	 Mechanical 2-Speed	 Torque Limiter
 Soft Start	 Built-in Job Light			



Variants	Battery	Charger	Carry Case
DDG461Z	NO	NO	NO



**MAKITA GULF FZE**

www.makita.ae |    

MAKITA TOOLS EDITION # 626