



HR3011FC_HR3012FC

ROTARY HAMMER (30mm) Adapted for SDS-PLUS bits

HIGH POWER and LOW VIBRATION



VIBRATION LEVEL

9.5 m/s²

MODE: Hammer Drilling

IMPACT ENERGY

3.9 J

EPTA-PROCEDURE 05/2009

With Dust Extraction System

Quick change
drill chuck



HR3012FC



DX11

HEPA
filter **AVT**

HR3011FC



DX10

HEPA
filter **AVT**

EXCELLENT DRILLING EFFICIENCY

Superior drilling efficiency

The impact energy is drastically increased from that of Predecessor model by redesigned hammering mechanism

Less bit wobbling

achieved by making bit guide portion 8mm longer than that of Predecessor model

Reversing switch lever



LED Job Light



Dust Extraction System HEPA filter



3 MODE


Hammering with rotation
Rotation
Hammering



AVT Anti Vibration Technology

Equipped with the following two different counterweights:

- Counterweight to cancel the back-and-forth vibration caused by hammering
- Counterweight to cancel the vibration caused by imbalanced rotation of crankshaft

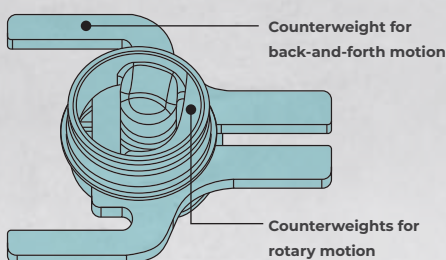


Anti-vibration side grip

absorbs excess vibration beyond the canceling capacity of the two counterweights.



Anti-vibration rear handle

Vibration absorbing performance is increased by two cushion rings added to connecting parts



Dust Extraction System

Compatible with long bits
Dust collection is available for bits with an overall length of up to 265mm

Depth gauge for increased drilling consistency

Equipped with HEPA Filter
which removes particles with an efficiency rating of 99.75% from the air passing through

HEPA filter

Filter cleaning mechanism
by turning the dial, the dust falls off from the filter

Transparent dust case
for easy checking of collected dust amount

Easy disposal of dust and easy cleaning of dust case
thanks to:

- Dust case cover easy to open / close with a single operation of a locking tab
- Wide opening of dust case

Dust case body is equipped with a fan for dust collection

ACCESSORIES

Dust Case Set

for DX11 / DX10
Part No. [191F49-8](#)



Dust Cup Set

for HR3011FC
Part No. [195173-3](#)
for HR3012FC
Part No. [195179-1](#)



Dust Cup

Bit dia: 14.5mm
Part No. [421342-3](#)
Bit dia: 12 - 16mm
Part No. [421664-1](#)



Drill Chuck Set

for HR3012FC
Part No. [191F46-4](#)



Tool Holder Set

for HR3012FC
Part No. [191F47-2](#)



Spacer Set

for HR3011FC
Part No. [191L91-5](#)



SPECIFICATIONS

	HR3012FC	HR3011FC
Continuous rating input	1,050W	1,050W
Impact Energy	3.9 J	3.9 J
Capacity	Concrete (w/ TCT Bit): 30 mm Concrete (w/ Diamond Core Bit): 80 mm Steel: 13 mm / Wood: 32 mm	Concrete (w/ TCT Bit): 30 mm Concrete (w/ Diamond Core Bit): 80 mm Steel: 13 mm / Wood: 32 mm
Chuck Capacity	1.5 - 13 mm	-
Blows Per Minute (BPM)	0 - 4,500	0 - 4,500
No Load Speed (RPM)	0 - 840	0 - 840
Dimensions (L x W x H)	386 x 98 x 242 mm	369 x 98 x 242 mm
Net weight	4.7 kg	4.8 kg
Power supply cord	4.0 m	4.0 m

Standard Equipment: Quick Change Drill Chuck (HR3012FC only), Depth Gauge, Side Grip, Carry Case.

Double Insulation
 Variable Speed
 Reversing
 Constant Speed
 SDS-PLUS Shank
 Torque Limiter
 Dust Collection
 Built-in Job Light
 Carry Case

MAKITA GULF FZE

www.makita.ae |