




SK700D / SK700GD

Rechargeable Multi Line Laser

Powered by 12V MAX CXT Li-ion battery

**3 x FULL 360° LINES FOR
QUICK AND EASY SETUP**

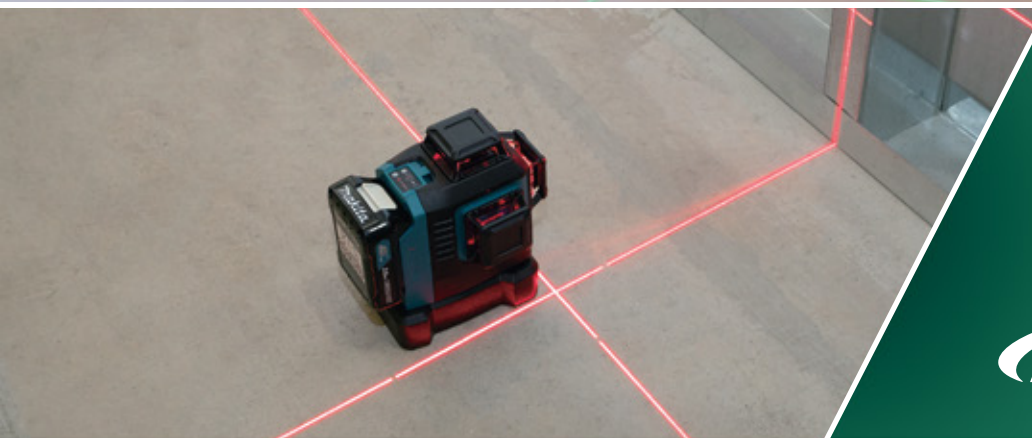


12V^{max}
LITHIUM-ION

CXT XPT


SK700GD

GREEN



SK700D

RED



Long Continuous Operation
(approx)

	GREEN	RED
BL1021B (2.0Ah)	7h	11h
BL1041B (4.0Ah)	14h	22h


Rotary base with eccentric rotation mechanism

- Reduces setup time
- Vertical laser lines can rotate around the defined plumb point up to 10° left and right (with a dial for fine adjustment)
- Eccentric rotation mechanism enables the laser body to rotate without changing the position of the defined plumb point, enabling easy line positioning



3 x full 360-degree laser lines

Full 360-degree line is created by letting the laser from a light source reflect on a cone mirror

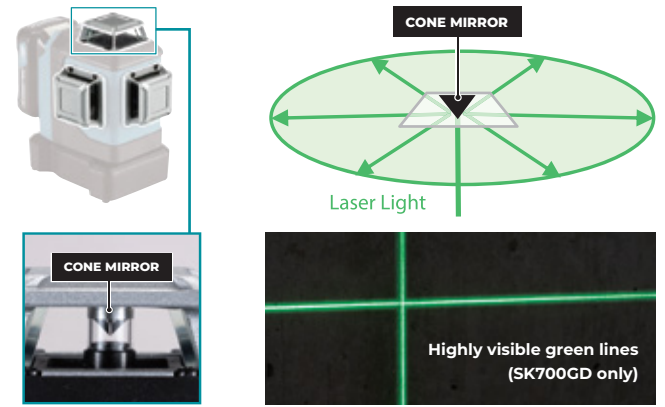

Brightness indicator

Bright ▶ Normal ▶ Eco Mode

Laser line selection

Levelling unlocked

Levelling locked For tilt applications

Switch

Line beam mode selection

Laser line selection and ON/OFF switch

Dust and Water Protection

Only the body of Line laser is IP54 rated



Also powered by ADP09 (AA battery pack)

Part No. CP00000001

ADP09 is an AA battery pack designed to supply power to the Laser.



It uses 8 x AA Batteries.

ACCESSORIES

Laser Receiver LDX1
Part No. LE00855702



Wall Mount
Part No. LE00870137

Wall and ceiling adapter for universal applications with height adjustment function



Min Tripod
Part No. TK0LM2000F



Tripod 1800
Part No. TK0LM4001F



Tripod 2900
Part No. TK0LM5030F



SPECIFICATIONS

Levelling accuracy	±2 mm / 10 m
Self-levelling range	±4°
Laser type	SK700GD: Laser class 2: 510 - 530 nm SK700D: Laser class 2: 630 - 645 nm
Operating Temperature	-10 - 50°C
Protection class	IP54
Dimensions (L x W x H)	168 x 104 x 153 mm (with BL1041B)
Net weight	1.2 kg

Standard Equipment: Target Plate, Adapter, Soft Bag.



Variants	Battery	Charger	Soft Bag
SK700DZ	NO	NO	YES
SK700GDZ	NO	NO	YES



MAKITA GULF FZE

www.makita.ae