


GA7080 (180mm) / GA9080 (230mm)

Large Angle Grinders (Straight Handle type)

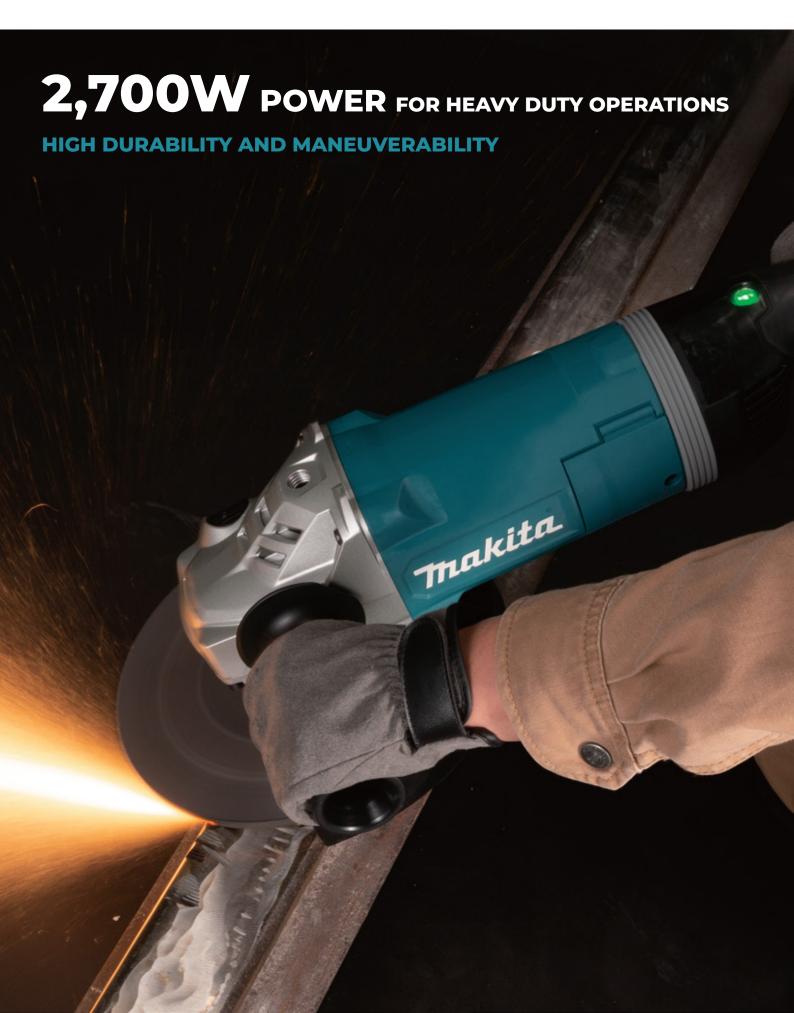

Continuous Rating Input: 2700W

with Anti-restart function, Anti-vibration main handle and Soft Start



Anti-restart function

prevents accidental startup Even if plugged in with the switch at "ON" position, the tool does not start. At this time, the indication lamp blinks red and shows that the unintentional restart proof device is functioning

Large Trigger switch



Torque limiter

Minimizes the chance of overtightening the lock nut at startups and in heavy duty applications

Rotatable main handle Can be positioned to suit most cutting and grinding operations



Low vibration main handle and side handle Side handle: Anti-vibration side handle

ACCESSORIES

Dust Collecting Wheel Guard

For Diamond Cutting Wheel Part No. 198514-2 (GA7080) Max cutting depth: 35mm Part No. 198440-5 (GA9080) Max cutting depth: 60mm





SPECIFICATIONS	GA7080	GA9080
Continuous Rating Input	2,700W (127V : 2400W)	2,700W (127V : 2400W)
Wheel Diameter	180 mm (7")	230 mm (9")
No Load Speed (RPM)	8,500	6,600
Sound Pressure Level	94 dB(A)	95 dB(A)
Sound Power Level	102 dB(A)	103 dB(A)
Vibration Level	Surface Grinding with anti vibration side grip 5.9 m/s ²	Surface Grinding with anti vibration side grip 5.3 m/s ²
Dimensions (L x W x H)	509 x 200 x 144 mm	509 x 250 x 144
Net weight	6.8 kg *	8.6 kg *
Power supply cord	2.5 m	2.5 m
Standard Equipment: Wheel	Cover, Anti-Vibration Grip, Lock Nut Wrench.	
Double Insulation Dust C	ollection 📶 Soft Start 🛐 Torque Limiter	
* Net Weight is including Wheel Cover	Assembly, Grip, Inner Flange and Lock Nut	