



## HR007G

Cordless Combination Hammer (28mm)

Powered by 40V MAX XGT Li-ion battery



Adapted for SDS-PLUS bits

## HIGH EFFICIENCY

using 40V MAX XGT battery as the power source



### 3 Mode

|          |                      |           |
|----------|----------------------|-----------|
| Rotation | Rotation + Hammering | Hammering |
|----------|----------------------|-----------|

Impact Energy  
[EPTA-Procedure 05/2009]

**3.0** Joule

Work Speed  
ø 10.5mm

**6.1** sec

Battery: BL4040





**Dust Extraction System for effective cleaning with HEPA Filter to capture concrete dust during drilling**  
Overall Length: 260mm



### Anti-Vibration Technology

Equipped with anti-vibration main handle and side handle to reduce vibration to operator's hands for less hand and arm fatigue from long continuous operation.

**AVT** Vibration level at main handle **8.6** m/s<sup>2</sup>



**Work Speed**  
Drilled holes to a depth of 60mm (2-3/8") at 8kg pressing load  
Concrete with compressive strength of 40N/mm<sup>2</sup>  
BL4040 / on full battery charge


| ø10.5mm (3/8") | ø12.5mm (1/2") | ø16.0mm (5/8") |
|----------------|----------------|----------------|
| <b>6.1</b> sec | <b>8.6</b> sec | <b>12</b> sec  |

### XPT eXtreme Protection Technology




### AFT Active Feedback sensing Technology

turns the motor OFF, if bit rotation is suddenly forced to stop

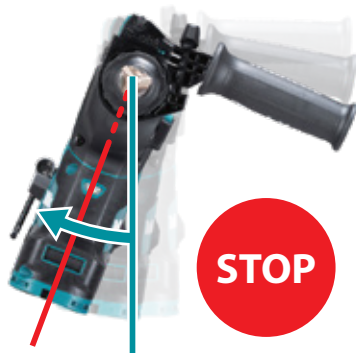

### AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth.  
The vacuum cleaner automatically runs while the switch is ON

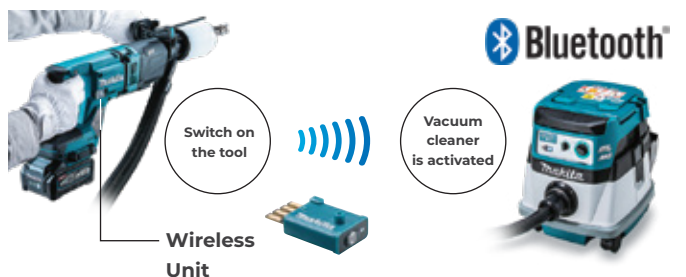

## OPTIONAL ACCESSORIES

### Dust Extraction System

**DX15** (Maximum bit size attachable:  $\varnothing 28\text{mm} \times 260\text{mm}$ )

Part No. 122B81-7



### Dust Cup Attachment

Part No. 195173-3



### Dust Case Set

Part No. 199586-0



### Filter Set

Part No. 199557-7



### Hammer Service Kit

Part No. 199233-3



## SPECIFICATIONS

|                        |  |
|------------------------|--|
| Impact Energy          | EPTA-Procedure 05/2009: 3.0 J  |
| Capacity               | Concrete/Steel/Wood/Core Bit/Diamond Core Bit (Dry Type):<br>28 / 13 / 32 / 54 / 65 mm   |
| Blows Per Minute (BPM) | 0 - 5,000  |
| No Load Speed (RPM)    | 0 - 980  |
| Vibration Level        | Hammer Drilling into Concrete: 7.5 m/s <sup>2</sup><br>Chiselling Function w/ Side Grip: 8.6 m/s <sup>2</sup><br>Drilling into Metal: 2.8 m/s <sup>2</sup> |
| Sound Pressure Level   | 94 dB(A)   |
| Sound Power Level      | 105 dB(A)  |
| Dimensions (L x W x H) | 473 x 101 x 240 mm (with BL4040)   |
| Net weight             | 3.0 kg (without battery)   |

**Standard Equipment:** Side Grip, Depth Gauge.

|                 |                |                    |            |       |
|-----------------|----------------|--------------------|------------|-------|
| Variable Speed  | Constant Speed | Torque Limiter     | Reversing  | Brake |
| Dust Collection | SDS-PLUS Shank | Built-in Job Light | Carry Case |       |



| Variants    | Battery                                    | Charger | Carry Case |
|-------------|--|---------|------------|
| HR007G Z01  | NO   | NO      | NO         |
| HR007G M201 | 2pcs of 40V MAX XGT Li-ion 4.0Ah batteries | YES     | YES        |



**MAKITA GULF FZE**

www.makita.ae |

MAKITA TOOLS EDITION # 561