



RT001G

Cordless Trimmer

Powered by 40V MAX XGT Li-ion battery

HIGH SPEED TRIMMING

Combination of 40Vmax XGT Lithium-Ion battery and Brushless motor deliver massive power for faster cutting than the corded trimmer

Trimmer Aluminium base compatible with a variety of optional trimmer bases



Trimmer base

(standard)
Round base for smooth and fast cutting with easy handling



Tilt base (optional)

Ergonomic body grip easy-to-grasp with one hand Tilting capacity: -30° to 45°



Plunge base

(optional)
Precision cutting depth adjustment / Plunge capacity: 0 - 35mm



Offset base (optional)

Stable trimming is possible with a bit set in offset position / Able to cut close to a wall or corner - 18.5mm at closest



XGT 40V^{max} Li-ion MOTOR BL AWS XPT

Soft start

minimizes start-up shock and makes the tool start smoothly

Push button switch

Lock/unlock button
On/Off switch button

Variable speed control
by dial

High durability and accuracy obtained

by using aluminum for body housing

Twin LED Job Lights

illuminate cutting edge and increase visibility



Constant Speed Control

minimizes the reduction in bit speed to provide stable trimming

Electric brake (Soft-brake)

The gentle stop of the product reduces the damage to the work material due to the reaction of the stop.



Extreme Protection Technology

Integrated seals designed to improve a tool's operation in harsh conditions by channeling water and dust from key internal components.

Collet Size

Accepts 6mm & 8mm collets, 1/4" collet.



Shaft lock

Flat-top design and provides stability for easier bit change



Auto-start Wireless System

The wireless activation function enables clean and comfortable operation. By connecting a supported tool to the cleaner, you can run the cleaner automatically along with the switch operation of the tool.

Note: Wireless unit is required to activate the Bluetooth Part #: 198900-7 (Optional).




SPECIFICATIONS

Collet Size	6/ 8 mm
No Load Speed (RPM)	110,000 - 31,000
Plunge Capacity	w/ Trimmer Base: 0 - 40 mm; w/ Plunge Base: 0 - 35 mm
Vibration Level	Rotation without Load: 2.5 m/s ² or less
Sound Pressure Level	81 dB(A)
Sound Power Level	92 dB(A)
Dimensions (L x W x H)	141 x 89 x 251 mm (with BL4040)
Net weight	1.5 kg (without battery)

Standard Equipment: Trimmer Base Assembly, Straight Guide, Wrench, Dust nozzle, Templet Guide.

Variable Speed Dust Collection Built-in Job Light Brake Soft Start Constant Speed Carry Case

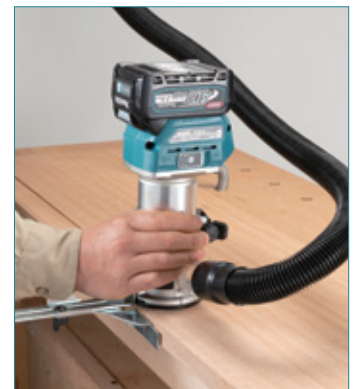


Variants	Battery	Charger	Carry Case
RT001G M202	2pcs of 40V MAX XGT Li-ion 4.0Ah batteries	YES	YES
RT001G Z04	NO	NO	NO

OPTIONAL ACCESSORIES


Templet guide

for Trimmer base



A(mm)	B(mm)	C(mm)	Part No.
8	10	9.5	343577-5

for Plunge base



A(mm)	B(mm)	C(mm)	Part No.
7.7	9.5	11.5	164379-4
9	11	13	164775-6
10	12	9	164388-3
11	12.7	13	164776-4
14	17	20	165366-6
14.5	16	13	193043-0
18	20	13	164393-0
22	24	13	165364-0
24	27	13	164470-8
25	29	15	163080-8
27	30	13	164471-6
37	40	13	165046-4
37	40	13	164472-4

Collet cone



Size	Part No.
8mm	763618-5
6mm	763636-3
1/4"	763637-1

Trimmer bases and its accessories


(1) Trimmer Base (Standard) Part No. 196613-4



Trimmer base with Grip attachment set
Part No. 196924-7



(2) Tilt Base (OPTIONAL) Part No. 198987-9



(3) Plunge Base (OPTIONAL) Part No. 195563-0



(4) Offset Base (OPTIONAL) Part No. 195562-2

Convenient for cutting wide workpiece



MAKITA GULF FZE

www.makita.ae |

MAKITA TOOLS EDITION # 578