



## UH014G

Cordless Hedge Trimmer (750mm)

Powered by 40V MAX XGT Li-ion battery

**Increased Cutting Speed and Torque  
for smooth and efficient cutting  
similar to those of engine hedge trimmers**



### UH014G

750 mm (29-1/2")


#### Sharp Edge Blades

Optimum blade shape for smooth cutting

Upper blade: curving downward

Lower blade: curving upward

#### Maximum branch diameter



Lightweight

**3.4 kg**

Without Battery

Cutting strokes  
per minute

**5,000 min<sup>-1</sup>**

High Speed Mode

Low Noise

**92 dB(A)**


**XGT**  
**40V** LI-ION  
**max**

**BL**  
**MOTOR**

**XPT**


**Bevel-tipped curved blade with excellent sharpness**

- Bevel-tipped tooth enables the blade to easily catch, firmly hold and sharply cut twigs or thin branches
- Curved teeth reduce friction resistance to suppress energy loss

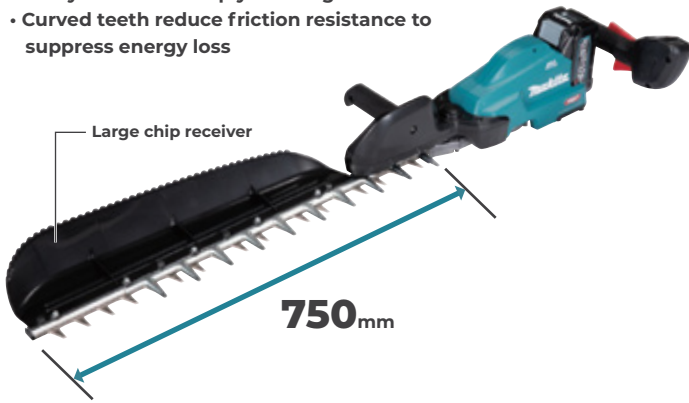



**Easy-to-use front handle**

- Redesigned the gripping position of Front handle and place the enter of gravity on the line connecting Front handle and Rear handle to reduce the force applied in the direction of twisting the wrist



**Easy-to-use front handle**


- Due to the inclination of Front handle end, it can be gripped when cutting the top surface, the angle at which the wrist is returned can be reduced, and wrist fatigue is reduced

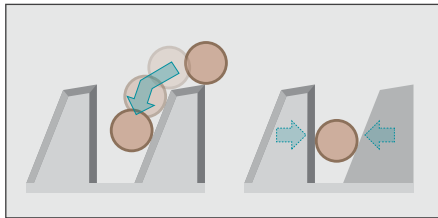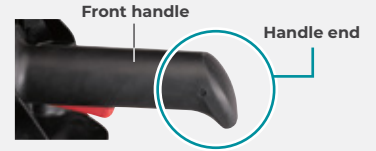

Twigs are caught easily & held firmly



**Reverse rotation system**  
release the blade when it is jammed by thick branches

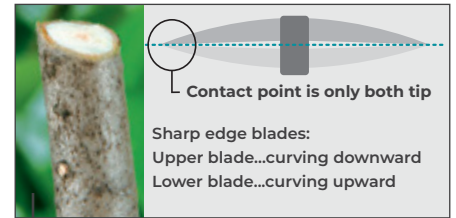

**Optimum blade shape for smooth cutting**



**Anti-vibration structure**  
consisting of Motor-crank section and handle section linked by cushions to absorb vibration from blade and motor-crank section

**XPT**  
**eXtreme Protection Technology**  
Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather

**Brushless Motor**  
provide high power and excellent cutting performance



**3-speed**  
High: 5,000 SPM  
Medium: 3,600 SPM  
Low: 2,000 SPM

SPECIFICATIONS	UH014G
Blade Length	750 mm
Tooth Spacing	35 mm
Max Branch Capacity	23.5 mm
Max Cutting Capacity	18 mm
Strokes Per Minute (SPM)	High / Med / Low: 5,000 / 3,600 / 2,000
Continuous Use (min.)	w/ BL4040 High / Med / Low: 80 / 155 / 380
Dimensions (L x W x H)	1,225 x 270 x 135 mm (without battery)
Net weight	3.4kg (without battery)

**Standard Equipment:** Blade Cover, Chip Receiver.

Brake
 Reversing
 Electronic 3-Speed
 Constant Speed
 Anti Vibration

ACCESSORIES	Part No.
Shear Blade (750mm)	<b>191Y05-2</b>
Chip Receiver Assembly set	<b>191D34-9</b>

Variants	Battery	Charger	Carry Case
UH014GM101	1pc of 40V MAX XGT Li-ion 4.0Ah battery	1pc Fast Charger	NO
UH014GZ	NO	NO	NO



**MAKITA GULF FZE**

www.makita.ae |